

Our Products

weha
Everything for the Stone Industry





Our Products

Fiberglass rodding & stands	3
Containers	7
Trestles	13
Belts, loops & straps	17
Storage systems	23
Slab grabs	31
Portable gantry cranes	37
Fork-lift extension devices	41
Transportation & transfer	45
Trolleys & carriages	57
Transportation systems	71
Vacuum lifters	81
Jib cranes	91
Workshop equipment	95
Fixings	107
Pneumatic tools	115
WEZIT chisel	127
Compressor WFK 9	127
Portable bench saws	129
High pressure cleaner WH 1650H	132
Suction cabins	133
Stencils & accessories	141
Saw blades - wet use	151



Material Handling

Fiberglass rodding & stands



Fiberglas Rodding

For granite, marble, all natural stones, Engineered stones and Quartz counter tops.

▼ St = steel core

Profile mm	Length m	Carbon reinforcement	Art.-#
10 x 3	50	yes	118735
10 x 3	100	yes	119188
10 x 3	100	no	133922
10 x 3 St	100	yes	133229
15 x 3	30	yes	8160062
15 x 3	100	yes	8160063
6 x 3	100	yes	126487




Rodding Stand „STRONG“

Cuts rodding material easy and exactly. Suitable for lots of different profiles.

- ▣ mobile version

Length mm	1000
Width mm	650
Height mm	910
Art.-#	8160069

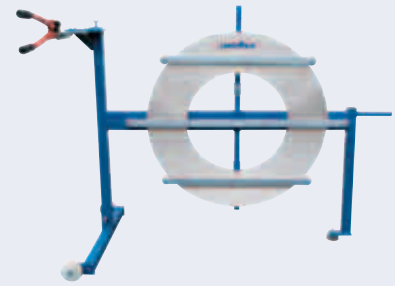

Rodding Stand galvanized

Enables accurate and secure unwinding of GRP profiles.

- ▣ for almost every profile
- ▣ easy to roll off
- ▣ galvanized

Length mm	1040
Width mm	610
Height mm	1250
Art.-#	8160071



Rodding Stand powdercoated

Enables accurate and secure unwinding of GRP profiles.

- ▣ for almost every profile
- ▣ easy to roll of
- ▣ powdercoated

Length mm	1040
Width mm	610
Height mm	1250
Art.-#	133051




Rodding stand Yellow Line

Stabile and sturdy construction of sectional steel.

- ▶ painted
- ▶ showed rodding is not included

Length mm	1100
Width mm	680
Height mm	880
Art.-#	137205

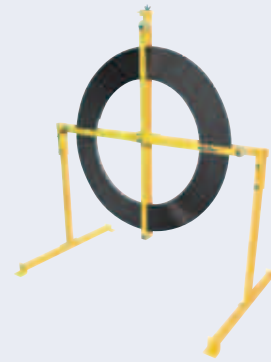


Sub-construction material

Test winner guarantees easy and fast reinforcement of thin material with risk of fracture.

- ▶ 2 mm white covering
- ▶ tested by TÜV-Rheinland, section engineering
- ▶ fixing with instand adhesive
- ▶ grooves are not needed
- ▶ single sided bevel milling (10 mm) guaranties a perfect bonding into the edges

Length mm	Width mm	Thickness mm	Art.-#
3000	60	27	132946
3000	60	17	132945
3000	750	17	136190

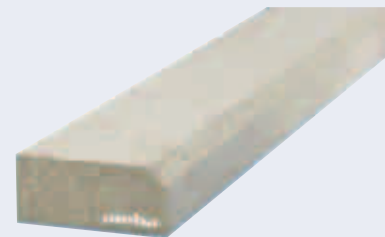



Material Handling Containers




Dumper shovel 1200 kg

To clear away rubble and snow. Fits for every fork length, unlocking via cable. Automatic locking when draining. A chain secures the blade from slipping off the forks.

- ▶ Painted model
- ▶ 5 mm steel plate
- ▶ tiltable

Length mm	1000
Width mm	1000
Height mm	500
Fork holes mm	155 x 60
Capacity kg	1200
Art.-#	8010151

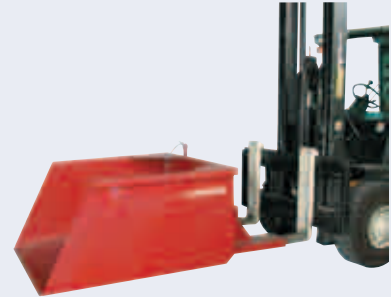


Dumper shovel 1500 kg

To clear away rubble and snow. Fits for every fork length, unlocking via cable. Automatic locking when draining. A chain secures the blade from slipping off the forks.

- ▶ Painted model
- ▶ 5 mm steel sheet
- ▶ tiltable

Length mm	1500
Width mm	1300
Height mm	750
Fork holes mm	200 x 70
Capacity kg	1500
Art.-#	8010152

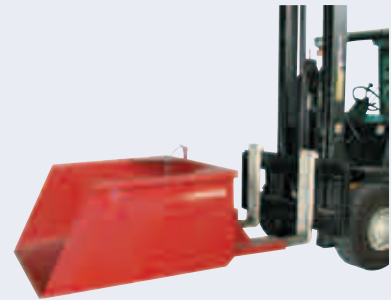

Mortar bucket 200 l

Suitable to transport mortar, dirt or sand.

- ▣ crenable
- ▣ blue coloured
- ▣ high-strength plastic
- ▣ surrounding steel frame

Width mm	660
Height mm	470
Length mm	1000
Volume l	200
Art.-#	4051010



Mortar bucket 250 l

Suitable to transport mortar, dirt or sand.

- ▣ crenable
- ▣ blue coloured
- ▣ high-strength plastic
- ▣ surrounding steel frame
- ▣ forklift receivers

Width mm	750
Height mm	560
Length mm	1065
Volume l	250
Art.-#	119864



Mortar bucket 333 l

Suitable to transport mortar, dirt or sand.

- ▣ crenable
- ▣ blue coloured
- ▣ high-strength plastic
- ▣ surrounding steel frame

Width mm	700
Height mm	740
Length mm	1050
Volume l	333
Art.-#	8010156



Mobile tipping container 0,8 m³

To solve the waste problem in workshops. Suitable for transport with forklift.

- ▣ solid steel
- ▣ galvanized
- ▣ tiltable

Length mm	1450
Width mm	980
Height mm	740
Volume m ³	0.8
Capacity kg	1500
Art.-#	8010153



Mobile tipping container 0,6 m³

Multi-purpose waste container for use with forklift. Movable with solid rubber castors.

- ▣ solid steel
- ▣ galvanized
- ▣ tiltable

Length mm	1150
Width mm	1050
Height mm	1120
Volume m ³	0.6
Capacity kg	800
Art.-#	8010144



Waste Container stackable

To solve the waste problem in workshops. Suitable for transport with forklift.

- ▣ galvanized steel

Length mm	1600
Width mm	1200
Height mm	800
Capacity kg	1500
Art.-#	8010176



Hinged container 0,7 m³

Perfect for every waste problem.

- ▣ solid steal
- ▣ galvanized

Length mm	1000
Width mm	1000
Height mm	700
Volume m ³	0.7
Capacity kg	1000
Art.-#	8010146



Hinged container 1,25 m³

Perfect for every waste problem.

- ▣ solid steal
- ▣ galvanized

Length mm	1250
Width mm	1250
Height mm	1000
Volume m ³	1.25
Capacity kg	1200
Art.-#	8010149



Big-Bag (5 pcs.)

Suitable for stonewaste, flagging, sand, grit.

- ▣ less weight
- ▣ tear-resistant
- ▣ recyclable

Length mm	900
Width mm	900
Height mm	900
Capacity kg	1500
Package	1
Art.-#	8010800



Frame for Big-Bag

- ▣ Length 1005 mm
- ▣ Height 1400 mm
- ▣ painted

Art.-#	134432
--------	--------





Material Handling

Trestles



Trestle „STAR“ 750 kg

Extremely sturdy frame. Each height and rotation can be determined with a clamping device.

- 2 pcs. of wood on the table
- extremely strong spindle
- 2 pcs. fixed castors Ø 200 mm
- 2 pcs. castors Ø 200 mm
- powdercoated

Capacity kg	750
Seating mm	500x500
Height adjustment mm	560-930
Stand space mm	670x640
Art.-#	8010130



Trestle „SATURN-ECO“ 750 kg

Extremely sturdy frame. Each height and rotation can be determined with a clamping device.

- 2 pcs. fixed castors Ø 200 mm
- 2 pcs. castors Ø 200 mm
- powdercoated

Capacity kg	750
Seating mm	500x500
Height adjustment mm	560-930
Stand space mm	700x650
Art.-#	8010131



Trestle „KOMET“ 800 kg

With 5 feet - extremely stable

- 2 pcs. fixed castors Ø 200 mm
- 2 pcs. castors Ø 200 mm
- powdercoated
- whiffletree

Capacity kg	800
Seating mm	500x500
Height adjustment mm	620-950
Stand space mm	700
Art.-#	8010139



Hydraulic trestle „MAXX“ 800 kg

Due to its hydraulics very fast height adjustment, with 5 feet extremely secure. Adjustment by a foot pedal. The position of the stone does not change during the height adjustment.

- 2 pcs. fixed castors Ø 200 mm
- 3 pcs. castors Ø 200 mm
- powdercoated
- whiffletree

Capacity kg	800
Seating mm	500x500
Height adjustment mm	600-950
Stand space mm	700
Art.-#	135035



Trestle „SATURN EXTRA“ 1000 kg

Very strong thread spindel adjustment. Possible to block in each height.

- 2 pcs. fixed castors Ø 200 mm
- 2 pcs. castors Ø 200 mm
- easy running wheels
- powdercoated

Capacity kg	1000
Seating mm	500x500
Height adjustment mm	560-930
Stand space mm	700x650
Art.-#	8010132




Trestle „Heavy load“ 1500 kg

Very strong thread spindel adjustment. Possible to block in each height.

- 2 pcs fixed castors Ø 200 mm
- 2 pcs. castors Ø 200 mm
- easy running wheels
- whiffletree

Capacity kg	1500
Seating mm	650x650
Height adjustment mm	630-890
Stand space mm	800x800
Art.-#	8010135



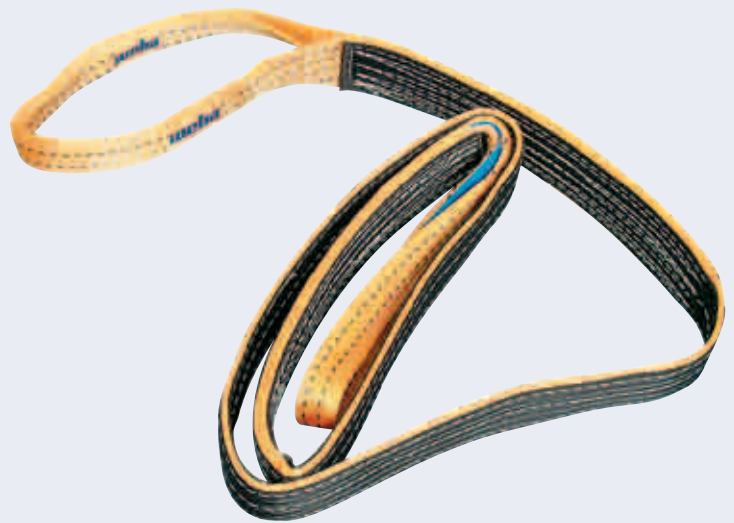

Material Handling Belts, loops & straps

weha

Lifting belt

Textile lifting accessories with two loops for quick and uncomplicated displacements of components.

- ▀ section 75x8 mm
- ▀ maximum capacity 2000 kg

Length mm	Art.-#
2000	8100120
3000	8100130
3500	8100135
4000	8100140
5000	8100150




Lifting belt with loops

Two loops for fast and uncomplicated packing / lifting.

- ▀ double-sided abrasion protection
- ▀ loops very tightly sewn
- ▀ double stitched
- ▀ 8-fold safety

Capacity kg	Length mm	Profile mm	Art.-#
500	2000	50 x 4	8100420
500	2500	50 x 4	8100425
500	3000	50 x 4	8100430
500	3500	50 x 4	8100435
500	4000	50 x 4	8100440
500	4500	50 x 4	8100445
500	5000	50 x 4	8100450
1000	2500	75 x 4,5	8100555
1000	5000	60 x 4,5	8100580

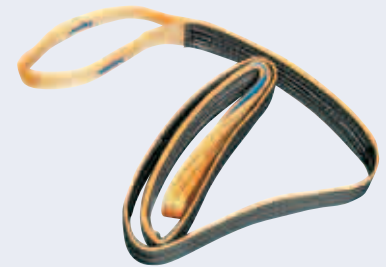


Lifting sling „Mammut“

For fast and easy lifting of workpieces.

- ▶ polyester
- ▶ thickness 18 mm
- ▶ capacity max. 2000 kg
- ▶ extremely light-weight, soft and safe

Length mm	Art.-#
2000	8100812
3000	8100813
4000	8100814
5000	8100815
6000	8100816

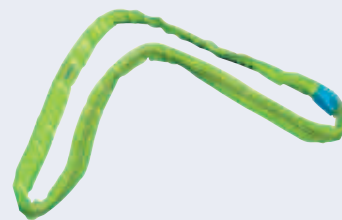


Edge protectors

Protect the edges of the boxes when fixing the strap

- Enormous pressure distribution thanks to the wide surface of the edge protection corner
- Reliably prevents the slipping of the strap

Band width mm	25
Package	1000
Art.-#	8101093

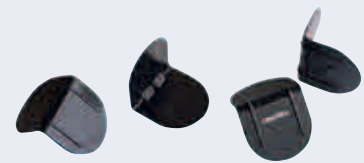

One-piece lashing 8 m

To secure the loading goods on the truck.


Band width mm	50
Capacity kg	4000
Art.-#	8101080



Two-piece lashing 8 m

To secure the loading goods on the truck.

Band width mm	50
Capacity kg	4000
Art.-#	8101085

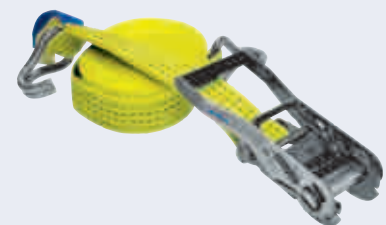


Lashing strap with automatic reeling

For quick and convenient rolling up the strap, simply press the red button.

- Load can be quick and easy fixed
- Maximum drawbar pull directly 750 kg
- Lashing capacity allocated 1500 kg

Band width mm	50
Length mm	3000
Package	1
Art.-#	136103

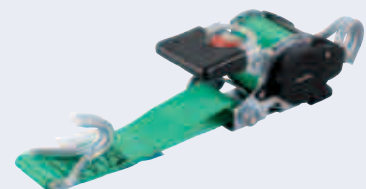

Strapping set „SECURO“

Fast and practical lashing of cargo.

- ✔ 1 pcs. dispenser
- ✔ 1 pcs. strapping tape
- ✔ 1000 pcs. brackets
- ✔ 1 pcs. tensioner

Profile mm	15x0,45
Length mm	10000
Capacity kg	160
Art.-#	SET080019



Tensioning device for strapping band

For the lashing of the goods via a polyester strapping.

Art.-#	8101095
--------	---------



Polyester strapping

Protect your conveyed products against slipping safe and easy with our polyester straps.

Length mm	60000
Capacity kg	880
Package	1
Art.-#	8101106




SAFE load securing bundle


With the Weha SAFE load securing bundle you can easily transport your loads from the workshop to the construction site.

Includes:

- 2 pieces lifting slings (2000 kg circumference 4 m)
- 2 pieces Heavy duty lashings
- 8 non-slip mats 180 x 120 mm
- 1 piece cover net 3,5 x 2 m

Capacity kg	2000
Art.-#	126887

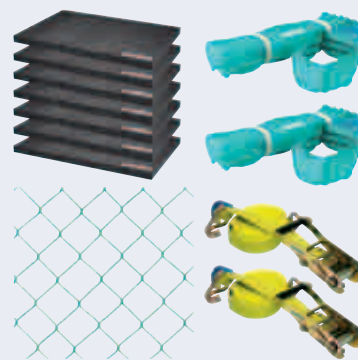

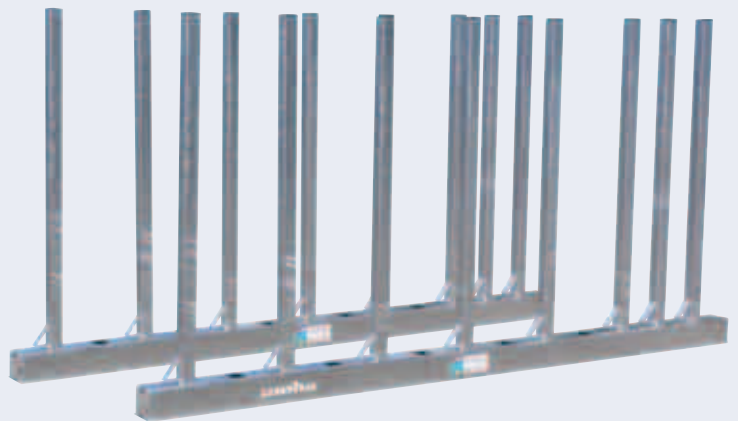

Material Handling

Storage systems




Slab Rack IRAXX

Offers safe stacking of stone slabs, including bundles of granite, marble, engineered stone and all natural stone. Super Strong rails and pipes for high stability.

- Simple connectors to connect 2 rails
- shim at the end of the bars
- galvanized
- rubber cap white

Rail length mm	3000
Tube length mm	1500
Art.-#	137328

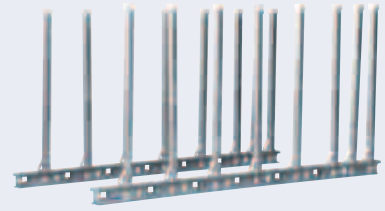


Slab Rack RR

Offers safe stacking of stone slabs, including bundles of granite, marble, engineered stone and all natural stone. Super Strong rails and pipes for high stability.

- 1 set: 20 pipes, 2 rails
- round tubes
- galvanized

Tube length mm	Rail length mm	Art.-#
1000	3000	SET080002
1500	3000	SET080004

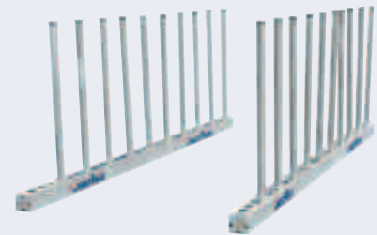


Slab Rack BISON

BISON granite slab rack is the SAFEST slab storage rack on the market. Each pole comes with its own individual angle bracket for setting the correct angle on the poles.

- 1 set: 16 pipes, 2 rails
- square tubes
- galvanized

Tube length mm	1500
Rail length mm	3000
Art.-#	SET080042

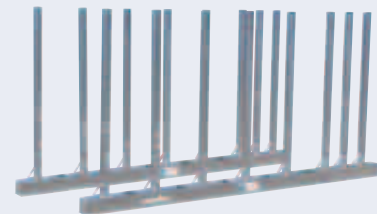


Remnant rack „RELICO“

Perfect for the storage of residual pieces like windowsills.

- 1 set: 20 pipes, 2 rails
- round tubes
- galvanized

Tube length mm	750
Rail length mm	2400
Art.-#	125423

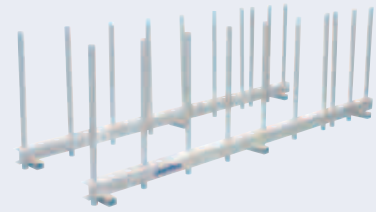

Slab stand foot

This foot works as an anti-tilt safety device thanks to his corner sheet. In combination with the tubes it allows to „paging“ the slabs.

- total height 1500 mm
- length 500 mmm
- top width 200 mm
- down width 100 mm

Art.-#	8010503
--------	---------



A-frame „TRAPEZ“

Stacking of natural stone slabs in storage.

- powdercoated
- u-profile

Length mm	2000
Width mm	65
Height mm	1485
Art.-#	8020684



A-frame „SECUR“ 2 m

For stacking of natural stone slabs in stock. Improved working safety in conjunction with optional support.

- big slabs can be backed up during removal
- galvanized

Length mm	2000
Width mm	40
Height mm	1300
Art.-#	8010436



A-frame „SECUR“ 2,5 m

For stacking of natural stone slabs in stock. Improved working safety in conjunction with optional support.

- big slabs can be backed up during removal
- galvanized

Length mm	2500
Width mm	40
Height mm	1300
Art.-#	8010437



Connection bar for A-frame „SECUR“

For easy connection of 2 A-frame „SECUR“

- ▀ galvanized

Length mm	2000
Width mm	50
Height mm	30
Art.-#	8010439



Support for slab stand Secur

Essential improved working safety.

Additional support for slab stand „Secur“
supporting length 1m; galvanized

Length mm	1000
Width mm	60
Art.-#	8020680



Support for A-Frames

Safely handling by storing or outsourcing stone slabs possible.

- ▀ galvanized
- ▀ incl. rubber pad

Width mm	230
Height mm	1526
Art.-#	135012



A-Frame Yellow Line

For stacking natural stone slabs on site.

- ▀ painted
- ▀ it comes cut into 2 pcs.
- ▀ built up within a few minutes

Length mm	1520
Width mm	115
Height mm	1500
Art.-#	137200



Shelf „SOLO“

For a clean and tidy storage with an optimum use of space and upwards.

- Set of 4 levels
- Easy to assemble
- galvanized execution
- 600 kg load capacity per level
- Shelf elements are free
- Regal Row indefinitely renewable
- Variable and quickly-adjustable width
- For use 2 risers are required

Length mm	880
Width mm	1000
Height mm	1310
Capacity kg	2400
Art.-#	8010464



Gravestone shelf „QUICK“

For a clean and tidy storage with optimum space utilization and upwards.

- 5 Piece levels
- galvanized execution
- 800 kg load capacity per level
- Support arms with timber support
- Extension arms with connectors
- Easy retraction with forklift

Length mm	1100
Height mm	3000
Capacity kg	4000
Adjustable width mm	700-1500
Art.-#	8010466




Weha Slab Stand

Essential for orderly storage of different heights and widths workpieces.

Cut stone stand 3000x1800x400mm
completely galvanizes; w. 10 putting in receptacl

very useful for storage of work pieces of various
mountings (incl. tube cover). Bottom struts with

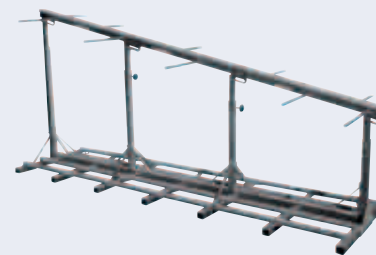

Length mm	3000
Width mm	400
Height mm	1800
Art.-#	8010438

Stacking cylinder 100x80 mm

For the storage of tranches and grave stones. As a replacement for the conventional wooden planks. Made of durable plastic.

Width mm	80
Height mm	100
Capacity kg	11700
Art.-#	8010431



Stacking cylinder 150x150 mm

Storage of gravestones or tranches. Replacement for wood. Made of durable plastic.

Width mm	150
Height mm	150
Capacity kg	10000
Art.-#	8010429





Material Handling

Slab grabs



Lifter „KAIMAN“

Light and compact construction. Reinforced pressure plate for even safer handling. Ideal for the easy extraction from tight piles of slabs.

✔ Certified

Capacity kg	Gripping width mm	Height mm	Rubber color	Art.-#
600	5 - 30	316	black	125958
600	5 - 30	316	white	126191
1200	15 - 50	360	black	8010223
1200	15 - 50	360	white	8010229
1200	20 - 60	380	black	8010228
1200	20 - 60	380	white	8010231
1200	30 - 75	400	black	8010221
1200	30 - 75	400	white	8010224



Lifter „JUMBO II“

For massive stone and smaller blocks of stone. With locking automatism. Perfect protection: jaws completely galvanized prevent scratches on the valuable materials. Additional protection is given by the rubber coating. With return springs on the jaws.


Capacity kg	1500
Gripping width mm	500 - 1000
Gripping surface mm	200 x 200
Height mm	500
Art.-#	8010217



Lifter R400

Very manageable and light slab grab with small dimensions and galvanized surface. Jaws and other contact surfaces are completely rubber coated. A return spring keeps it in the vertical position.

Capacity kg	400
Gripping width mm	20 - 140
Gripping surface mm	150 x 100
Height mm	420/300
Art.-#	8010202

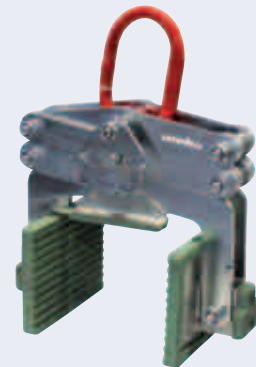

Lifter R400 „TWIN“

Very manageable and light slab grab with small dimensions and galvanized surface. Especially suitable for fragile slabs. Jaws and other contact surfaces are completely rubber coated.

Capacity kg	800
Gripping width mm	20 - 140
Gripping surface mm	400 x 100
Height mm	390/280
Art.-#	8010204



Lifter „R1000“

Heavy-duty slab grab, very robust with galvanized surface. Jaws and other contact surfaces are completely rubber coated. A return spring keeps it in the vertical position. When the slab is being put down, a locking mechanism locks automatically.

Capacity kg	1000
Gripping width mm	20 - 200
Gripping surface mm	200 x 200
Height mm	820/640
Art.-#	8010210



Lifter „R1500“

Heavy-duty slab grab, very robust with galvanized surface. Jaws and other contact surfaces are completely rubber coated. A return spring keeps it in the vertical position. When the slab is being put down, a locking mechanism locks automatically.

Capacity kg	1500
Gripping width mm	20 - 200
Gripping surface mm	200 x 200
Height mm	850/640
Art.-#	8010215



Lifter „R1000 JUMBO“

For solid steps and smaller stone blocks. With automatic lock. Fully vulcanized jaws preventing scratching of plates and other high quality materials. Additional protection during placement by rubber pad. With return spring at the jaws.

Capacity kg	1000
Gripping width mm	250 - 500
Gripping surface mm	200 x 200
Height mm	1130/640
Art.-#	8010216



Lifter for tilting Riba

Light and manageable slab grab for vertical transport of slabs. A cable guide guarantees slab lowering without problem. Rubber coated jaws.

▀ plate Ø80 mm with rubber


Capacity kg	Gripping width mm	Height mm	Pressure plates	Art.-#
500	15 - 75	300	4	8010235
1200	20 - 170	400	8	126807
1400	20 - 270	500	12	8010245



Monument lifter R1000+

Reliable grab for the transfer and set up of monument slabs. A long clamping lever presses the jaw on the stone and guarantees max. work safety.

Capacity kg	1000
Gripping width mm	280
Gripping surface mm	170 x 160
Height mm	370
Art.-#	8010205

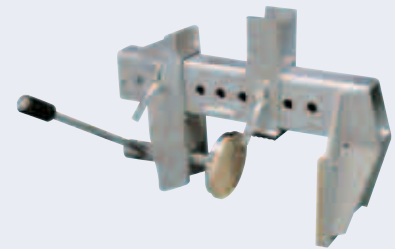

Lifter R600 „Ceramics“

Especially suitable for thin, brittle material.

- ▀ automatic lock
- ▀ focus adjustment by splint

Capacity kg	600
Handle width mm	5 - 20
Length mm	1400
Height mm	750
Art.-#	128210



Lifter R1000 KERAMOS

Massive lifter especially for transportation of thin stone material.

Capacity kg	1000
Handle width mm	1-100
Length mm	684
Height mm	470-610
Art.-#	124972



Safety wedge

Perfect for up or downloading.

Art.-#	122817
--------	--------





Material Handling

Portable gantry cranes

weha

Gantry crane „IP2T“ aluminium 2 t

For cemetery and workshop. For loading and unloading of grave stones.

- ▀ easy transportation and construction
- ▀ working width infinitely adjustable
- ▀ each foot individually adjustable
- ▀ geared trolley

Lower edge mm	1995 - 3220
Stand width mm	1715
Capacity kg	2000
Design height mm	2295 - 3520
Rail length mm	4000
Weight kg	215
Art.-#	SET080036



Gantry crane „IP“ aluminium 1,5 t

For cemetery and workshop. For loading and unloading of grave stones.

- ▀ easy transportation and construction
- ▀ working width infinitely adjustable
- ▀ each foot individually adjustable
- ▀ geared trolley

Lower edge mm	1995 - 3220
Stand width mm	1715
Capacity kg	1500
Design height mm	2295 - 3520
Rail length mm	4000
Weight kg	169
Art.-#	SET080026



Gantry crane „IP“ aluminium 1 t

For cemetery and workshop. For loading and unloading of grave stones.

- ▀ easy transportation and construction
- ▀ working width infinitely adjustable
- ▀ each foot individually adjustable
- ▀ geared trolley


Lower edge mm	1995 - 3220
Stand width mm	1715
Capacity kg	1000
Design height mm	2295 - 3520
Rail length mm	5000
Weight kg	169
Art.-#	SET080027



Gantry crane „SPLIT“ 1,5 t

For cemetery and workshop. For loading and unloading of grave stones.

- easy transportation and construction
- working width infinitely adjustable
- each foot individually adjustable
- folding beam
- geared trolley

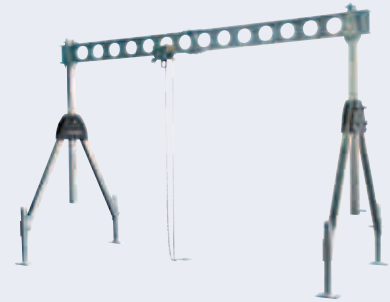

Design height mm	2295 - 3520
Capacity kg	1500
Lower edge mm	1995 - 3220
Rail length mm	4000
Stand width mm	1715
Weight kg	200
Art.-#	SET080039

Gantry crane „PICCO“ 0,5 t

For cemetery and workshop. For loading and unloading of grave stones. Adjustable feet for optimum leveling.

- easy transportation and construction
- working width infinitely adjustable
- each foot individually adjustable
- folding beam
- geared trolley



Design height mm	3000
Capacity kg	500
Lower edge mm	2800
Rail length mm	3500
Stand width mm	1600
Weight kg	80
Art.-#	8010197

Hoist for gantry crane

Extremely easy operation.

- chain store
- 3000 mm chain

Capacity kg	Art.-#
500	8010189
1000	8010191
1500	8010193





Material Handling

Fork-lift extension devices



Boom „rigid“ 2090 mm

Simple boom with swivel-hook, safety chain and supporting foot.

- swivel-hook adjustment by grid
- galvanized

Max capacity kg	2400
Radius mm	2090
Fork holes mm	184 x 84
Art.-#	8010604



Boom „Amigo“ Typ 1, length 3450 mm

Upgrade your forklift into a mobile boom.

- 4 times height adjustable
- galvanized
- universall for each forklift
- more height because of position from hook

Max capacity kg	2500
Radius mm	3450
Fork holes mm	184 x 84
Art.-#	8010603



Boom „Amigo“ Typ 2, length 4500 mm

Upgrade your forklift into a mobile boom.

- 4 times height adjustable
- galvanized
- universall for each forklift
- more height because of position from hook

Max capacity kg	2500
Radius mm	4500
Fork holes mm	184 x 84
Art.-#	8010608




Boom „rigid“ with expulsion 3040 mm

Simple boom with swivel-hook, safety chain and supporting foot.

- galvanized

Max capacity kg	2400
Radius mm	3400
Fork holes mm	184 x 84
Art.-#	VD080255

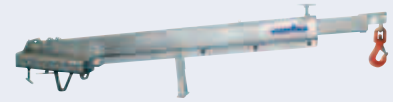

Snowblade for forklift

Robust snow clearing shield which includes a rubber scraper that fits almost any truck.

- rubber strip
- anti slip protection
- angle adjustment on both sides 10°/20°

Length mm	1500
Width mm	675
Height mm	660
Fork holes mm	200 x 100
Art.-#	8010155



Forklift eye hook 1000 kg

To put onto the fork. Swivel hook for easy using.

- galvanized

Width mm	135
Height mm	75
Fork holes mm	185 x 85
Capacity kg	1000
Art.-#	8010591




Magnet protection mat with felt 1 m

Protection of slabs or gravestones during transportation.

- Self adhesive magnetic strips

Length mm	1000
Width mm	100
Height mm	11
Art.-#	8100602

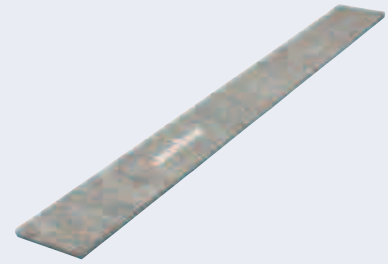


Magnet protection mat with felt 1,2 m

Protection of slabs or gravestones during transportation.

- Self adhesive magnetic strips

Length mm	1200
Width mm	100
Height mm	11
Art.-#	8100598

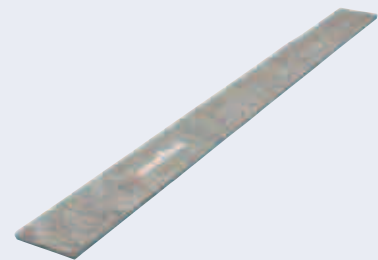


Magnet protection mat with PU 1 m

Protection of slabs or gravestones during transportation.

- Self adhesive magnetic strips
- Roughened surface
- Material PU

Length mm	1000
Width mm	80
Height mm	10
Art.-#	8100599

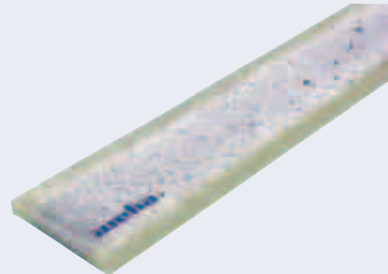



Material Handling Transportation & transfer

weha

Suction cup „Porter“ 100 kg

Strong and robust lifter with high capacity, especially for large and heavy work-pieces. Suitable for all materials with smooth a surface. A corresponding warning mark, the vacuum can check at any time. Thus safe operation is guaranteed.

- ✔ Built-in vacuum pump in the handle
- ✔ Hand pump made of brass
- ✔ Transportation box

Suction plate mm	200
Max lifting capacity horiz. kg	100
Max lifting capacity vert. kg	50
Rubber color	black
Art.-#	8010421



Suction cup „Porter 2“, 150 kg

Strong and robust lifter with high capacity, especially for large and heavy work-pieces. Suitable for all materials with smooth a surface. A corresponding warning mark, the vacuum can check at any time. Thus safe operation is guaranteed.

- ✔ transportation box
- ✔ handle made of brass

Suction plate mm	250
Max lifting capacity horiz. kg	150
Max lifting capacity vert. kg	75
Rubber color	black
Art.-#	8010416



Ratched seam setter „Compo“

Excellent for ES stone, composite materials, marbles, all granites (especially white or light colored stone).

- ✔ micro adjustment
- ✔ transportation box

Suction plate mm	200
Rubber color	white
Art.-#	122814



Ratched Seam Setter „Mammut“

Fine adjustments can be made by means of a micro adjustment screw creates a perfectly tight and level seam. It is also suitable for glueing of broken parts.

Suction plate mm	200
Rubber color	black
Art.-#	8010418



Vacuum cup set „SMART“ 25 kg

Used for fast and easy laying of tiles. The vacuum is created within seconds by pressing on any smooth surface. Briefly lateral lifting of the sealing lip, the workpiece can settle quickly. Ideal for quick lifting of already freshly laid tiles to reposition.

Set includes:

- 2 of cups
- 1 transportation box

Suction plate mm	105
Max lifting capacity horiz. kg	25
Art.-#	8161267



Suction lifter „Typ 2“ 80 kg

Smart aluminium-lifter for lifting different workpieces with smooth surface. Vacuum production by tiling black levers.

Suction plate mm	117
Max lifting capacity horiz. kg	80
Max lifting capacity vert. kg	40
Rubber color	black
Art.-#	8010422



Suction lifter „Typ 3“ 100 kg

Smart aluminium-lifter for lifting different workpieces with smooth surface. Vacuum production by tilting black levers.

Suction plate mm	120
Max lifting capacity horiz. kg	100
Max lifting capacity vert. kg	50
Rubber color	black
Art.-#	8010423



Suction lifter „GS1“ 40 kg

Smart plastic-lifter for lifting different workpieces with smooth surface.

Suction plate mm	110
Max lifting capacity horiz. kg	40
Max lifting capacity vert. kg	20
Art.-#	8010424



Suction lifter „GS2“ 80 kg

Smart plastic-lifter for lifting different workpieces with smooth surface.

Suction plate mm	117
Max lifting capacity horiz. kg	80
Max lifting capacity vert. kg	40
Rubber color	black
Art.-#	8010425



Single seam setter, 1 cup

Made specifically to align kitchen plates when moving. Once the lifter is fixed to the plate, it can be accurately aligned using a ratchet and drawbar. It is also possible to fix wall panels during the bonding phase.

► Including adjusting

Suction plate mm	110
Rubber color	black
Art.-#	8010426



Single seam setter, 2-cups

Traction device for aerating multipart kitchen countertops or counter tops. On the workpiece a lifter is fixed respectively. Precisely adjustable via screw. Also ideal for cementing broken workpieces.

▀ micro adjustment

Suction plate mm	110
Rubber color	black
Art.-#	8010427



Suction assembly „POLYP“

Transporting worktops or bath covers. Special aluminum profiles allow a flush mounting of the lifters and thus provide optimum safety. The lifters can be placed at any location.

Set includes:

- 2 pcs. of aluminium rails 2140 mm
- 12 pcs. of suction cups Ø 117 mm

Length mm	2140
Art.-#	SET080040




Angle suction assembly „POLYP“

It supports and protects your kitchen and bathroom tops in transport, reducing the chance of breaking the top. A special construction makes it possible to adjust the rail on the angular dimensions 30°, 45°, 90° or 180°.

Set includes:

- 2 pcs. of aluminium rails 2200 mm
- 12 pcs. of suction cups Ø117 mm

Length mm	2200
Art.-#	SET080041

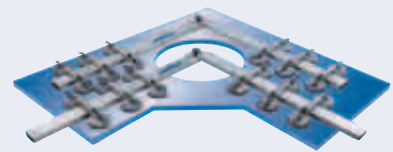


Weha Kitchensherpa

Robust light metal construction with integrated wheels.

For a safe and easy carrying and pushing of stone slabs weighing up to 250 kg.

- Length 1700-2700 mm
- Rail removable
- Handles adjustable

Art.-#	8010409
--------	---------

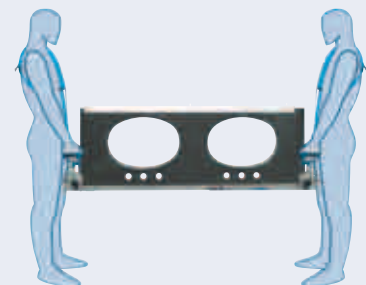


Frame to carry kitchen labs

Tiles and kitchenlabs are getting bigger and bigger. With the help of our Weha frame you will be able to work more gentle. It's perfect for carrying big tiles or kitchenlabs made of naturstone or ceramics.

► 16 pcs. of cups each Ø110 mm

Length mm	3650
Width mm	1000
Art.-#	134429

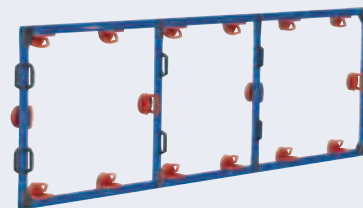

Carry clamps „Gecko“ 80 kg

Designed for up to 40 mm of material. Double handles for up to 4 people. The more weight that is lifted, the tighter the grip. rubber pads prevent marks or damage to the stone. Comes as a set of 2 pieces. For hand use only.



Gripping width mm	0 - 40
Art.-#	8010406

Stone lifter 20 - 160 mm

2 pieces of lifting handles, which are connected by an axis. Hand side rubber grips, load side PVC protection which prevents scratching of the stone.


Gripping width mm	20 - 160
Art.-#	8010400



Stone lifter 20 - 140 mm

2 pieces of lifting handles, which are connected by an axis. Hand side rubber grips, load side PVC protection which prevents scratching of the stone.

Gripping width mm	20 - 140
Art.-#	8010410

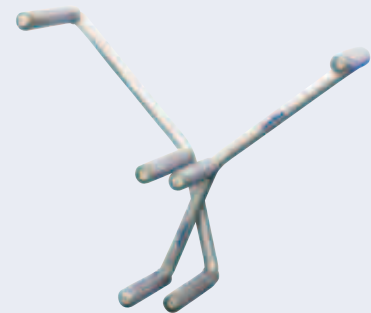

Clamp for kerbs

Perfect tongs for aerating kerbs or curbs.

- Maximum immersion depth 190 mm
- provided handles with rubber
- galvanized

Gripping width mm	0-430
Art.-#	VD080505



Reinforcing rail 2000 mm

Safe transport of workpieces with cutout. Fixing of workpieces via thumb screws and aluminium strip.

- ▶ range 0-50 mm
- ▶ felt for protection

Length mm	2000
Art.-#	118623



Manipulator gear 1000 kg

For crane operation, for easy and safe turning of the stones. Lockable wheels which avoid independent spinning during the transport.

► belts not included

Height mm	500
Width mm	660
Roll width mm	90
Capacity kg	1000
Art.-#	8010600




Manipulator gear 1500 kg

Laterally adjustable pick-up hooks for crane and forklift operation. Lockable wheels which avoid independent spinning during the transport.

► Similar to the Small Manipulatpr gear, however with laterally adjustable receiving eye hooks for crane and fork-lift.

Height mm	520
Width mm	1340
Roll width mm	90
Capacity kg	1500
Art.-#	8010602

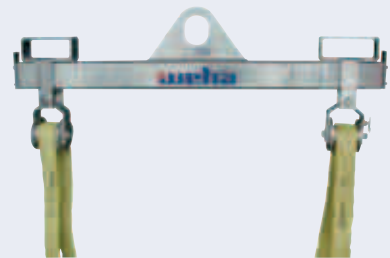

Mounting aid „FERROFIX“

The suction plates are slidably mounted on the rail and therefore suitable for all common ceramic hobs. 4 adjustable leveling feet enable a perfect flush alignment. The design enables accurate and fast assembly.

► 2 pieces of aluminum rails with 2 each vacuum suction cups Ø 115 mm

Length mm	530
Art.-#	8010415




Transportsystem „WOLF“

Innovative transport system for short ground-lifting of workpieces made of natural stone and concrete.

- ▶ multiple use of the anchor
- ▶ no use of belts/loops necessary
- ▶ no spreading
- ▶ fast preparedness
- ▶ proprietary
- ▶ high safety
- ▶ Made in Germany

Capacity kg	2000
Ø mm	230
Art.-#	121638

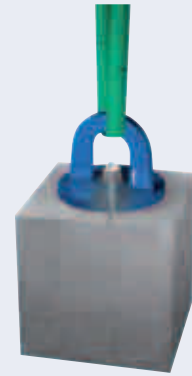

KOMBI transport system for kerbs

Perfect for transporting kerbs. Using the drawbar supplied you can convey heavy kerbs easily.

- ▶ Maximum clamping range 50-130 mm
- ▶ 1 piece collet for borders
- ▶ 1 piece drawbar

Capacity kg	250
Art.-#	SET080078





Material Handling Trolleys & carriages

weha

Hand truck „WTR 750“

Massive steel-construction with rubber handle and wooden coating.

Capacity kg	750
Height mm	1260
Track width (outside) mm	640
Tires mm	400 x 100
Handle width mm	550
Blade size mm	425x55
Art.-#	8010103



Hand truck „WTR 600“ Runner

Universal use with massive tube-construction.

- ▶ perfect height of handle
- ▶ perfect width of handle
- ▶ white rubber
- ▶ galvanized

Capacity kg	600
Height mm	1265
Track width (outside) mm	535
Tires mm	300
Handle width mm	468
Blade size mm	410x75
Art.-#	128555



Hand truck „WTR 500“ with lifting device

Height adjustment by hand crank. Massive tube-construction.

- ▶ wooden coating

Capacity kg	500
Height mm	455-900
Track width (outside) mm	650
Tires mm	400 x 100
Handle width mm	650
Blade size mm	500x80
Art.-#	8010520



Hand truck „WTR 1000“

Massive tube-construction and focus adjustment. Claws with rubber.

- ▀ wooden coating

Capacity kg	1000
Height mm	1560
Track width (outside) mm	720
Tires mm	400 x 100
Handle width mm	600
Art.-#	8010104



Hand truck „TR 500“

Massive tube-construction. Simply and handy.

- ▀ handle with rubber
- ▀ vulcanized shovel
- ▀ powdercoated

Capacity kg	500
Height mm	1210
Track width (outside) mm	620
Tires mm	260x85
Handle width mm	510
Blade size mm	450x180
Art.-#	8010090



Hand truck „WTR 801“ with track-adjustment

Universal and practical with focus adjustment. Claws with rubber.

- ▀ wooden coating

Capacity kg	800
Height mm	1340
Track width (outside) mm	395-590
Tires mm	300x100
Handle width mm	550
Art.-#	8010101



Hand truck „WTR 1001“

Universal with focus adjustment. Massive tube-construction. Claws with rubber.

- ▀ wooden coating

Capacity kg	1000
Height mm	1560
Track width (outside) mm	460-660
Tires mm	400x100
Handle width mm	600
Art.-#	8010107



Hand truck „Woody“

Robust wood construction with support legs.

- ▀ rubberized shovel
- ▀ rubberized support surface

Capacity kg	400
Tires mm	260
Handle width mm	400x100
Blade size mm	95
Art.-#	137794



Cart for hand truck „WTR“

Rebuild your hand truck within seconds into a four-wheels-dolly.

- ▀ whiffletree
- ▀ 2 pcs. castors

Tires mm	260x85
Capacity kg	1000
Art.-#	8010110




Caps for claws „WTR“

Protects your stone slabs during transport by claws against slipping and scratching.

- ▀ Mouth 40x20 mm
- ▀ Length 120 mm
- ▀ Width 27 mm
- ▀ rubber
- ▀ 1 pair

Art.-#	8100606
--------	---------

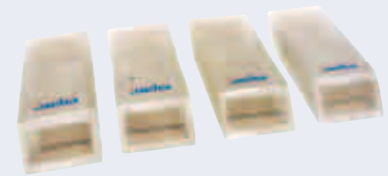

Claw for WTR 1000/1001

Protects your stone slabs during transport against slipping and scratching.

- ▀ includes a pin hole to fix

Art.-#	8020467
--------	---------




Claw for WTR 800/801

Protects your stone slabs during transport against slipping and scratching.

- ▀ includes a pin hole to fix

Art.-#	8020454
--------	---------

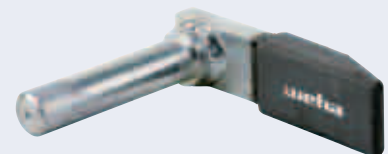

Slab trolley „Buggy“

Handy trolley for indoor transport of cuttings, kitchen countertops, etc. The wheels are positioned outside of the frame, thus increasing the stability. 2 swivel castors allow maneuvering in tight spaces. To protect all material contact points with rubber are occupied.

- Powder coated steel construction

Height mm	1070
Length mm	1400
Capacity kg	500
Track width (outside) mm	700
Tires mm	260x85
Art.-#	8010159



Trolley „WTW 800“

Wheel cart with tiltable bridge. When pressing from the vertical to the horizontal position, the pad automatically locks.

- claws flexible
- whiffletree

Height mm	460
Length mm	1100
Capacity kg	800
Track width (outside) mm	580
Tires mm	260x85
Art.-#	8010114



Trolley „WTW 1500“

Wheel cart with tiltable bridge. Drawbar steering by slewing ring. When pressing from the vertical to the horizontal position, the pad is automatically locked.

Four wheel truck with tilting platform.

Height mm	540
Length mm	1500
Capacity kg	1500
Track width (outside) mm	700
Tires mm	400 x 100
Art.-#	8010116



Slab wagon for rough plates

Transport Carriage for rough slabs on both sides loadable.

- ▀ transport with for lift possible
- ▀ robust heavy duty rollers

Height mm	650
Length mm	1300
Capacity kg	6000
Art.-#	8010115



Slab trolley for narrow ways

With this device, grave stones can be transported easily even in tight spaces. Holding supports are removable and can be adjusted to the width of the stone.

Stone car for narrow ways (38 cm)

This trolley can be used to move gravestones easily
700 mm pole, wooden bearing surface, adjustable a

Height mm	670
Length mm	1700
Capacity kg	500
Track width (outside) mm	360
Tires mm	260 x 85
Art.-#	8010118



Slab trolley V-shaped

Adjustable trolley for transport and storage of stone tablets. By removable support beam the trolley can be loaded from the front and from the side.

- ▀ Powder-coated design

Height mm	1200
Length mm	950
Capacity kg	1000
Tires mm	200
Art.-#	8161269



Slab trolley Swift

With the slab trolley Swift, counter tops or building blank covers vertically can be transported to the installation site.

- ▶ Lightweight aluminum construction

Height mm	835-1000
Length mm	1060
Capacity kg	500
Track width (outside) mm	530
Tires mm	200
Art.-#	8010157



Transport trolley for upstands and base boards

Versatile material trolley for storage and in-house transport of upstands and base boards. Five tilted layers per side guarantee a safe and break-free storage, as well as sorting by size or type of material. 20 detachable push-fit fasteners ensure extra safety during transport.

- ▶ 2 swivel castors with lock and 2 fixed rollers
- ▶ Robust frame construction with wooden cladding
- ▶ Surface powder coated
- ▶ Distance per level 220 mm
- ▶ Depth per level 303 mm

Height mm	1748
Length mm	1500
Capacity kg	600
Width mm	1200
Art.-#	138193



Trolley for stone cuttings „single-sided“

For internal transportation with lateral platform for edge processing.

▀ wooden coating

Capacity kg	1000
Height mm	1130
Tires mm	280
Length mm	1500
Seating mm	1500 x 560
Art.-#	8010142



Trolley for stone cuttings „MULTI“

For internal transportation of slabs and mobile intermediate storage.

The design allows a back-friendly depositing of workpieces, as they do not have to be lifted over a brace. By tilting the side shiftable strut also easily shorter workpieces can be stored. The drawbar is suspended when not in use in the holder and is therefore not in the way.

Capacity kg	1400
Height mm	900
Tires mm	280
Length mm	1050
Seating mm	1050 x 370
Art.-#	8010143



Platform truck 1600 x 800 mm

Four tires trolley made of sectional steel. Swivel bolster with combined ball bearing rim. Loading surface with water-resistant fiberboard.

Capacity kg	700
Tires mm	400 x 100
Seating mm	1600 x 800
Art.-#	8010121



Hydraulic tilting transport cart, 500 kg

Hydraulically adjustable for quick tilting of slabs. Hydraulic unit works with a 12 voltage battery.

- ▶ powdercoated
- ▶ framework with synthetic rolls

Capacity kg	500
Height mm	650 - 960
Seating mm	1380 x 2000
Art.-#	126680



Manual tilting transport cart, 800 kg

Tilting by swing drive. Can be used for different table heights.

- ▶ infinitely adjustable

Capacity kg	800
Height mm	700 - 860
Tires mm	260 x 85
Seating mm	2160 x 1410
Art.-#	8010126



Slab trolley „Butterfly“ 800 kg

Self locking spring loaded clamp for easily moving material around the shop as well as installation.

- ▶ whiffletree
- ▶ galvanized

Capacity kg	500
Height mm	860
Track width (outside) mm	570
Tires mm	260 x 85
Length mm	540
Seating mm	160
Art.-#	8010128



Connexion kit for slab trolley

The weight of the stone countertop is automatically clamped by a special mechanism. The tiller allows easy movement.

- ▶ two-piece

Length mm	250
Art.-#	8010111



Slab trolley „LOFT“ 500 kg

Superlight aluminium-transport trolley to move safe and back-friendly kitchenslabs etc.

Capacity kg	500
Height mm	550 - 800
Track width (outside) mm	420
Tires mm	260 x 85
Length mm	500
Seating mm	60
Art.-#	8010113



Stand for slab trolley LOFT

Single action foot with folding attachment and spring for the slab trolley LOFT

Length mm	400
Art.-#	8010207



2 wheel slab dolly, 500 kg

For transportation of natural stone slabs. Made of sturdy U-steel profile with wood support.

Capacity kg	500
Height mm	260
Track width (outside) mm	280
Tires mm	260 x 85
Length mm	500
Seating mm	500 x 80
Art.-#	8010119



Slab trolley long Yellow Line

For transporting marble slabs. Made of rigid U-Profil.

- ▶ painted
- ▶ covered with wood

Capacity kg	500
Height mm	180
Length mm	1000
Art.-#	137202



Slab trolley short Yellow Line

For transporting marble slabs. Made of rigid U-profile.

- ▶ painted
- ▶ covered with wood

Capacity kg	500
Height mm	260
Track width (outside) mm	280
Tires mm	260 x 85
Length mm	500
Seating mm	500 x 80
Art.-#	137203



Hand pallet truck „CARGO“ with scale

Very smooth pumping motion. Easy maneuvering even under high loads.

- ▶ scale in 5 kg steps

Length mm	1150
Capacity kg	2500
Art.-#	129666






Material Handling Transportation systems



Double sided A-frame

Versatile caddy for workpieces such as Kitchen worktops or panels for bathrooms. The plates lie or stand on special rubber profiles and are secured with adjustable, rubber-cushioned clamping elements. Four-point suspension for crane: no longer tilting possible.

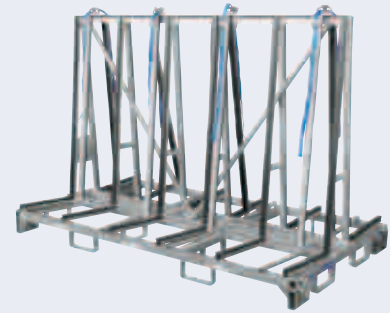

Length mm	Loading height mm	Width mm	Rubber color	Capacity kg	Art.-#
2000	850	800	black	1000	8010487
2000	1180	1100	black	1000	8010480
2400	1620	1100	black	1000	8010484
2500	1200	1100	black	1000	8010488
3000	2200	1200	black	5000	8010490

Single-sided A-frame 2000/670

Version with a supporting surface for the use in enclosed vans. The plates stand or lie down on special rubber profiles and are secured with four adjustable rubber-cushioned clamping elements.



Length mm	2000
Loading height mm	1180
Width mm	670
Rubber color	black
Capacity kg	1000
Art.-#	8010483

Conversion kit Mobilo II

To adapt a transport rack into a mobile transport cart for moving in workshop.

- 4 castors Ø 200 mm

Art.-#	133275
--------	--------



Roller bracket for A-frames

Easily loading and unloading of slabs on transport racks.

- Ø 60 mm
- galvanized

Art.-#	132569
--------	--------



Conversion kit „Mobilo“

With this additional equipment, the Caddy can be easily pulled by a person. The drawbar and the wheels can be fixed by changing the frame when not in use.

Includes:

- 2 pcs. of castors Ø 200 mm
- 1 pcs. whiffletree

Art.-#	SET080023
--------	-----------



Pallet rack

With this special attachment each pallet quickly can be turned into a caddy.

- Support area complete with rubber pads
- Extremely compact and can be dismantled
- With 2 pieces of clamping belts

Length mm	1200
Width mm	800
Loading height mm	750
Rubber color	black
Art.-#	8010165



Pallet rack „Europ“

Make your pallets to safe transportations for remnants.

- Easy to use
- Reusable
- Safe transportation
- Variable use

Loading height mm	730
Rubber color	black
Art.-#	8101120



Stacking pallet

Steel structure with wooden inlay for gentle storage of cuttings, window sills and the like.

Stacking pallet 150x60x67 cm galvanized

Steel construction with wooden inserts for protection etc. With four hooks for crane lifting. Suited for

Length mm	1500
Width mm	600
Height mm	880
Loading height mm	670
Capacity kg	1200
Art.-#	8010160




Stacking transport pallet

Transport with forklift or crane traverse (4 hooks) possible.

Stacking transport pallet 148x84x84 cm with removable supports, hot-dip galvanized


Sturdy Steel Construction, all supporting surface wood, 2 supports for easy loading are detachable, with stacker or crane traverse (4 hook positions)

Length mm	1480
Width mm	840
Height mm	840
Loading height mm	600
Capacity kg	1200
Art.-#	8010161

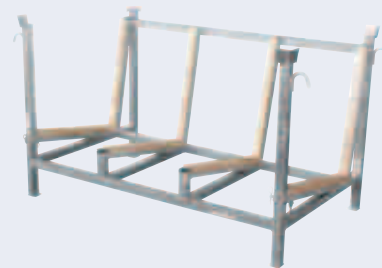

Adjustable transport pallet

For the safe transport and storage of crack initiation workpieces such as kitchen countertops or panels for bathrooms. The workpieces standing or lying on the wood profiles are secured with three adjustable, rubber-cushioned clamping elements.

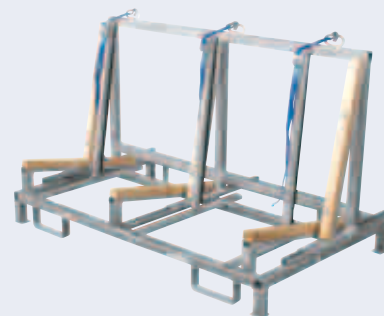

- ▣ Cradle for transport by forklift
- ▣ galvanized

Length mm	1390
Width mm	860
Height mm	870
Loading height mm	600
Capacity kg	1000
Art.-#	8010164

Conversion kit for transport pallet

For the transport of pallets.

- 2 castors Ø 200 mm with brake
- 2 fixed castors Ø 200 mm incl. drawbar

Length mm	1500
Width mm	840
Loading height mm	300
Capacity kg	800
Art.-#	8010163



Undercarriage for A-frame

For convenient indoor transport of transport frames incl. drawbar.

- galvanized
- drawbar
- 2 castors incl. brakes Ø 200 mm
- 2 fixed castors Ø 200 mm

Length mm	2400
Width mm	1000
Capacity kg	800
Art.-#	123626



Undercarriage for Europallet

For convenient indoor transport of transport frames incl. drawbar.

- drawbar
- galvanized version
- 2 fixed castors each Ø 200 mm
- 2 castors each Ø 200 mm incl. lock

Length mm	1200
Width mm	800
Capacity kg	800
Art.-#	123622



Transport and storage trestle 5 t

You can move big stone slabs round with your fork-lift. A base with poles prevents sliding of the stored slabs.

- ▶ 4 piece safety supports per length 1000 mm
- ▶ Galvanized version

Width mm	1500
Height mm	1600
Depth mm	960
Capacity kg	5000
Art.-#	8010476



Timbarac 1168 mm

Effective and especially flexible transport system. Basically, only two different parts of the system are needed.

- Effective and flexible
- Mounting by strapping
- Up to 80% cost savings when shipping
- Only one Euro pallet needed

Length mm	2000
Width mm	800
Height mm	1168
Capacity kg	500
Art.-#	137766



Timbarac 797 mm

Effective and especially flexible transport system. Basically, only two different parts of the system are needed.

- Effective and flexible
- Mounting by strapping
- Up to 80% cost savings when shipping
- Only one Euro pallet needed

Length mm	2000
Width mm	800
Height mm	797
Capacity kg	500
Art.-#	137767



Protection clip for Timbarac

The protection clip can be placed individual onto the slabs and easy to stick to a Euro pallet.

Art.-#	137768
--------	--------



Transport wheels Timbarac

The transport rollers pallets are mobile in a simple manner. Without any tools and heavyweight, the pallets can be made rollable within minutes.

- ▶ Backup Split for mounting
- ▶ set = 4 pcs. of wheels

Art.-#	137769
--------	--------





Transport rack „Alpha Board“

Perfect rack for storage or transportation of kitchen tops, glas or other sheetware. Synthetic blocks at the bottom prevent damage by water. Practical gaps for belts to fix the material. Rack is dismantled and will built up in a few steps. You will safe time and money. Other sizes by request.

- ▶ gaps for belt
- ▶ synthetic blocks to prevent damage by water

Length mm	1200
Width mm	800
Height mm	800
Capacity kg	1000
Art.-#	125102

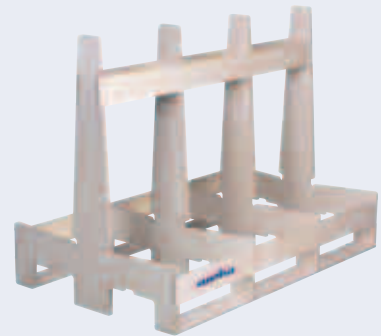

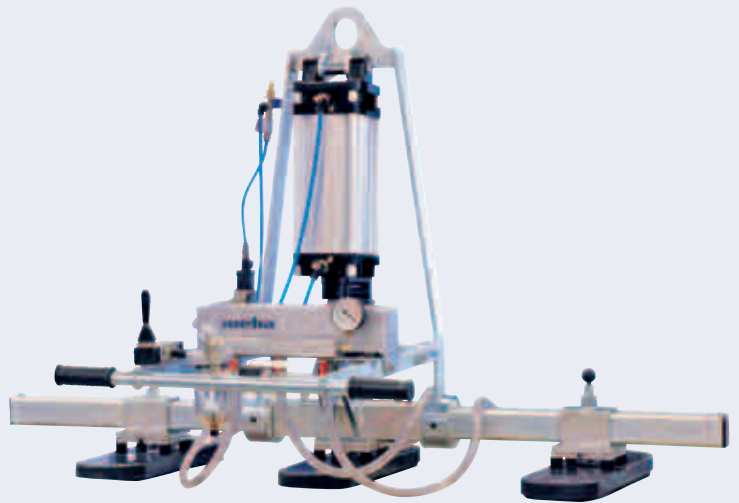

Material Handling

Vacuum lifters



EP 300 UNI PAD, 300 kg

Creating vacuum by handpump or compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	300
Max lifting capacity vert. kg	150
Suction plate size mm	540x150
Air consumption l/min	120
Operating pressure bar	5 - 6
Pneumatic ejector	yes
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	8010293



EP 600 UNI PAD, 600 kg

Creating vacuum by handpump or compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	600
Max lifting capacity vert. kg	300
Suction plate size mm	600x250
Air consumption l/min	120
Operating pressure bar	5-6
Pneumatic ejector	yes
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	8010297



EP 800 UNI PAD, 800 kg

Creating vacuum by handpump or compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.


Max lifting capacity horiz. kg	800
Max lifting capacity vert. kg	400
Suction plate size mm	700x300
Air consumption l/min	120
Operating pressure bar	5 - 6
Pneumatic ejector	yes
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	118674



T 800 UNI PAD, 800 kg

Creating vacuum compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	800
Max lifting capacity vert. kg	400
Suction plate size mm	700x300
Air consumption l/min	120
Operating pressure bar	5 - 6
Suitable surface	polished/coarse
Pneumatic ejector	yes
Art.-#	118656

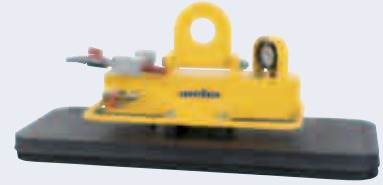

T 300 UNI PAD, 300 kg

Creating vacuum compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	300
Max lifting capacity vert. kg	150
Suction plate size mm	540x150
Air consumption l/min	120
Operating pressure bar	5 - 6
Pneumatic ejector	yes
Suitable surface	polished/coarse
Art.-#	8010296



T 600 UNI PAD, 600 kg

Creating vacuum compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	600
Max lifting capacity vert. kg	300
Suction plate size mm	600x250
Air consumption l/min	120
Operating pressure bar	5 - 6
Pneumatic ejector	yes
Suitable surface	polished/coarse
Art.-#	8010295




EP 300 UNI PAD, 300 kg

Creating vacuum by handpump. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

- ▶ Vacuum control takes place via optical and acoustic warning devices;
- ▶ Safety tank makes also with vacuum loss a safe setting down of the work piece possible.

Max lifting capacity horiz. kg	300
Max lifting capacity vert. kg	150
Suction plate size mm	540x150
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	123673

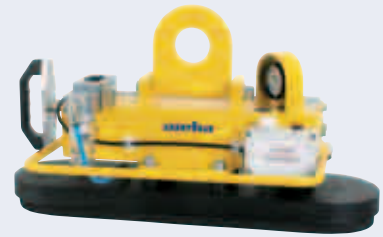

EP 800 UNI PAD, 800 kg

Creating vacuum by handpump. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	800
Max lifting capacity vert. kg	400
Suction plate size mm	700x300
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	118671



EP 600 UNI PAD, 600 kg

Creating vacuum by handpump. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

Max lifting capacity horiz. kg	600
Max lifting capacity vert. kg	300
Suction plate size mm	600x250
Suitable surface	polished/coarse
Hand pump	yes
Art.-#	120452



Vacuum lifter AC600 UNI-PAD

For vacuum generation, a power supply is just necessary. A vacuum tank guarantees at any vacuum loss even setting of the workpieces.

- ▀ tilting by handle

Max lifting capacity horiz. kg	600
Max lifting capacity vert. kg	300
Suction plate size mm	600x250
Suitable surface	polished/coarse
Voltage	380
Art.-#	126127




Vacuum-lifter „Quick“ 230V

Perfect for tiles because of 2 handles which are foldable during the transportation. It comes with a vacuum pump and is independently of compressed air. It works on smooth and rough surfaces because of a special suction cup.

- ▀ galvanized steel
- ▀ vacuum control by manometer

Max lifting capacity horiz. kg	300
Suction plate size mm	600x200
Suitable surface	polished/coarse
Voltage	230
Art.-#	8010011

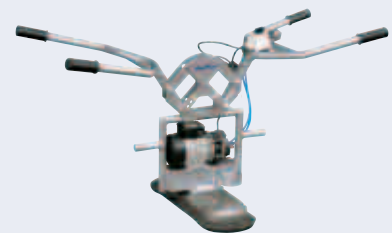


T 600/300 SV UNI PAD, 600 kg

Easy and fast lifting and selling of stone slabs. Perfect for placement and removal at grinding machines or saws. Also perfect for transporting in-company.

- changing rubber seal without any tool
- cup adjustable on traverse
- each cup tiltable for 90°
- each cup shut-off
- galvanized

Max lifting capacity horiz. kg	600
Max lifting capacity vert. kg	300
Suction plate size mm	540x150
Air consumption l/min	120
Traverse length mm	1500
Suitable surface	polished/coarse
Pneumatic ejector	yes
Turning the suction plates	pneumatic
Operating pressure bar	5-6
Art.-#	123424

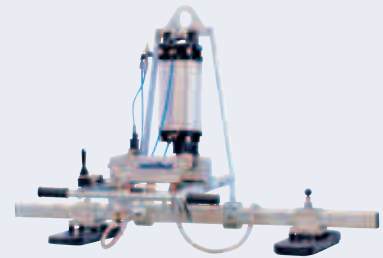

T900/450 SV UNI PAD

Easy and fast lifting and selling of stone slabs. Perfect for placement and removal at grinding machines or saws. Also perfect for transporting in-company.

- changing rubber seal without any tool
- cup adjustable on traverse
- each cup tiltable for 90°
- each cup shut-off
- galvanized


Max lifting capacity horiz. kg	900
Max lifting capacity vert. kg	450
Suction plate size mm	540x150
Suitable surface	polished/coarse
Pneumatic ejector	yes
Traverse length mm	1500
Turning the suction plates	pneumatic
Operating pressure bar	5-6
Air consumption l/min	120
Art.-#	8010336



T 900/450 SV, 900 kg

Easy and fast lifting and setting of stone slabs. Perfect for placement and removal at grinding machines or saws. Also perfect for transporting in-company.

- ▶ cup adjustable on traverse
- ▶ each cup tiltable for 90°
- ▶ each cup shut-off
- ▶ galvanized

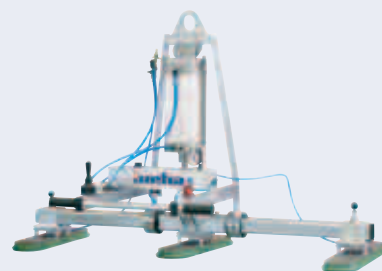

Max lifting capacity horiz. kg	900
Max lifting capacity vert. kg	450
Suction plate size mm	540x150
Air consumption l/min	120
Traverse length mm	1500
Suitable surface	polished
Pneumatic ejector	yes
Turning the suction plates	pneumatic
Operating pressure bar	5 - 6
Art.-#	8010341

Mobile parking station for vacuum lifters

For gentle stopping the vacuum lifter with bar.

- 2 pcs. fixed wheels
- 1 pcs. castor

Length mm	820
Width mm	740
Height mm	600
Art.-#	8010108



Suction cup UNI-PAD 540x150

To move from rough or smooth stone material

- changing the rubber seal without any tool
- cheap service and replace cost
- separate rubber seal

Max lifting capacity horiz. kg	300
Art.-#	8020838



Suction cup UNI-PAD 600x250

To move from rough or smooth stone material

- changing the rubber seal without any tool
- cheap service and replace cost
- separate rubber seal

Max lifting capacity horiz. kg	600
Art.-#	8020839



Suction cup UNI-PAD 700x300 mm

To move from rough or smooth stone material


- changing the rubber seal without any tool
- cheap service and replace cost
- separate rubber seal

Max lifting capacity horiz. kg	800
Art.-#	8020840




Vacuum lifter T400/200 ceramic

Lightweight construction variant for special applications on thin material such as decton, ceramics, etc.

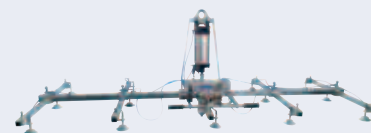

- ▶ Pivoting pneumatic (SV)
- ▶ 15 pieces of suspended suction plates
- ▶ Each suction plate can be displaced on the traverse

Max lifting capacity horiz. kg	400
Max lifting capacity vert. kg	200
Suction plate size mm	100
Air consumption l/min	120
Operating pressure bar	5-6
Art.-#	137172

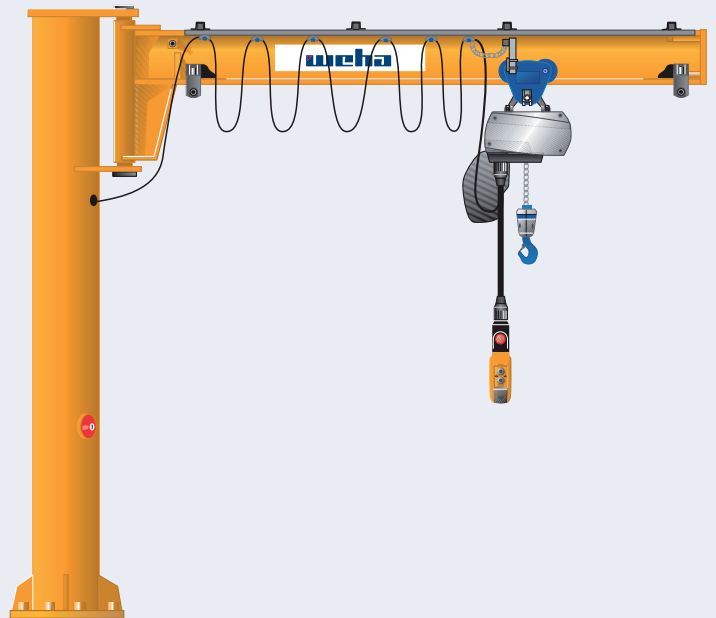

Material Handling

Jib cranes



Wall jib crane VW

Robust steel construction with a solid jib for high usable crane hook height.

- ▶ Painted in RAL 1007 daffodil yellow
- ▶ Height from bottom of boom: 3125 mm
- ▶ Operating voltage: 3/PE~50 Hz 400 V
- ▶ Type of control: direct control
- ▶ Protection: IP 55

Capacity kg	500
Radius mm	4500
Slewing range °	270
Hook path mm	2662
Design height mm	3485
Cross travel	manual
Swivel	manual
Art.-#	122481




Wall jib crane LWX

Robust steel construction with a solid jib for high usable crane hook height.

- ▶ Painted in RAL 1007 daffodil yellow
- ▶ Operating voltage: 3/PE~50 Hz 400 V
- ▶ Type of control: direct control
- ▶ Protection: IP55

- ▶ Electric chain hoist 250 kg
- ▶ Painted in RAL 5017 traffic blue
- ▶ Lift 2-stage
- ▶ Duty cycle: 60% ED
- ▶ Circuits: 360 c/h

Capacity kg	250
Radius mm	4000
Slewing range °	180
Cross travel	manual
Swivel	manual
Art.-#	133517

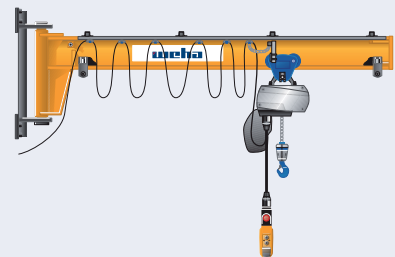


Wall jib crane LW

Profile boom from robust steel in a lightweight construction.

- Painted in RAL 1007 daffodil yellow
- Operating voltage: 3/PE~50 Hz 400 V
- Type of control: direct control
- Protection: IP55

- Electric chain hoist 500 kg
- Painted in RAL 5017 traffic blue
- Lift 2-stage

Capacity kg	500
Radius mm	6000
Slewing range °	180
Cross travel	manual
Swivel	manual
Art.-#	131807

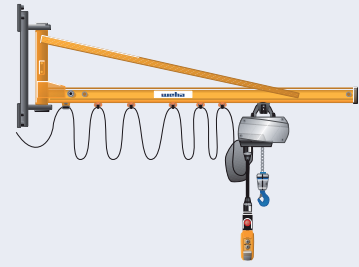


Pillar jib crane VS

Robust steel construction with a solid jib for high usable crane hook height.

Painted in RAL 1007 daffodil yellow

- Height from bottom of boom: 2380 mm
- Operating voltage: 3/PE~50 Hz 400 V
- Type of control: direct control
- Protection: IP55

Capacity kg	1000
Radius mm	4000
Slewing range °	360
Hook path mm	1848
Design height mm	2800
Cross travel	manual
Swivel	manual
Art.-#	129431

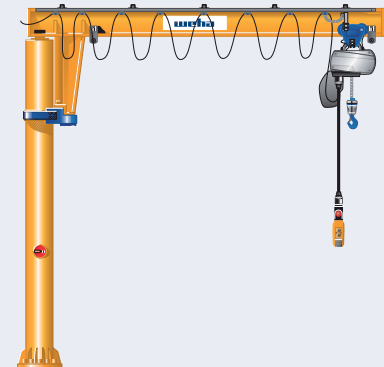


Pillar jib crane LSX

Robust steel construction with a solid jib for high usable crane hook height.

- Painted in RAL 1007 daffodil yellow
- Overall height: 3300 mm
- Operating voltage: 3/PE~50 Hz 400 V
- Type of control: direct control
- Protection: IP55

- Electric chain hoist 500 kg
- Painted in RAL 5017 traffic blue
- Lift 2-stage
- Duty cycle: 60% ED
- Circuits: 360 c/h
- Mounting with intermediate plate

Capacity kg	500
Radius mm	4000
Slewing range °	270
Design height mm	3300
Cross travel	manual
Swivel	manual
Art.-#	135530

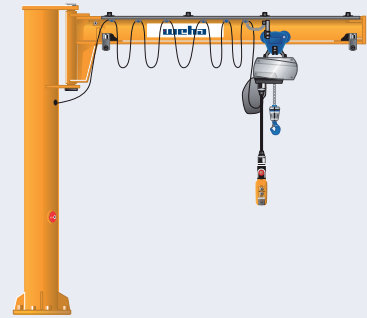


Pillar jib crane LS

Profile boom from robust steel in a lightweight construction.

- Painted in RAL 1007 daffodil yellow
- Operating voltage: 3/PE~50 Hz 400 V
- Type of control: direct control
- Protection: IP55

- Electric chain hoist 500 kg
- Painted in RAL 5017 traffic blue
- Lift 2-stage
- Duty cycle: 60% ED
- Circuits: 360 c/h
- Fixing with anchor bolts and template

Capacity kg	250
Radius mm	4000
Slewing range °	270
Design height mm	3300
Cross travel	manual
Swivel	manual
Art.-#	136904

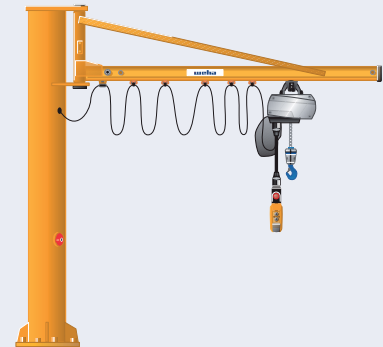



Material Handling Workshop equipment


weha

Counter top work table „ZIP“ 2

Workshop table for pre-assembly. Control and post-processing of kitchen counter-tops. A special fastening system makes it possible to connect multiple tables. By using an additional angle connection countless combinations are possible

► height adjustable

Length mm	2000
Width mm	500
Height mm	800-1100
Capacity kg	400
Tires mm	Ø 125
Art.-#	8010443

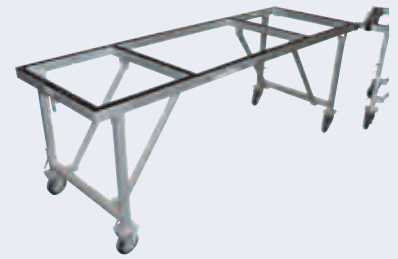

Counter top work table

Workshop table for pre-assembly. Control and finishing of kitchen plates. A special locking system allows the connection of the tables.

► height adjustable

Length mm	1000
Width mm	500
Height mm	800-1100
Capacity kg	400
Tires mm	Ø 125
Art.-#	8010449



Angle connector for workbench Zip

With these angle connectors you can assembly the Weha workbench Zip together. Countless combinations are possible.

► Adjustment range 0 to 90°

Art.-#	8010451
--------	---------




Working Table Sisar

Workshop table for pre-assembly at the production or construction site. It works well for built up kitchen. Table is adjustable in the middle by a accordion.

- ▶ adjustable length: 370-1530 mm
- ▶ adjustable height: 850-1150 mm
- ▶ 4 pcs. of castors Ø130 mm
- ▶ powdercoated

Length mm	1530
Width mm	750
Height mm	850
Capacity kg	350
Tires mm	130
Art.-#	134804

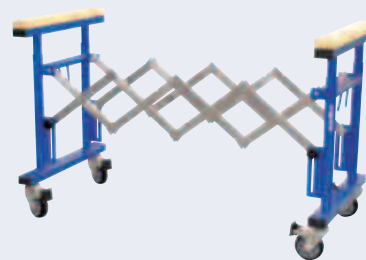


Workbench „Kitchenboy“

The ideal working table for kitchen countertops, vanity tops, counter tops etc.
Variable height adjustment by handle, tilt adjustment up to 85 ° in both directions by a swivel gear.

- ▀ Distribution of individual wooden coverings possible
- ▀ For the processing of interior cutouts
- ▀ Material safety when tilted
- ▀ Adjustable positioning guide
- ▀ Stand width 1000 mm

Length mm	2000
Width mm	670
Height mm	650-1060
Tires mm	Ø 200
Capacity kg	250
Art.-#	8010444

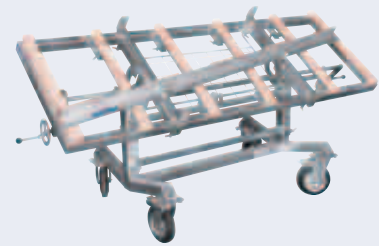

Fabrication work table „COMPO“

Multi functional working station for granite, marble, quartz and all natural stone counter top work pieces.

- ▀ fixable and mobile
- ▀ perfekt for cutting
- ▀ no crossbar
- ▀ white rubber

Length mm	1935
Width mm	614
Height mm	1015
Capacity kg	300
Art.-#	122816



Fabrication stand „PIT“

Universally applicable for many workshop activities. Per crank mechanism, the buck can be continuously adjusted to the desired working height. Collapsible feet save space when the block is set aside. Adjustable feet enable skewing of the bearing surface. Foot plate with leveling for absolute stability, even at ground unevenness.

- ▶ PVC padding protects workpieces
- ▶ Height adjustable

Length mm	800
Width mm	640
Height mm	785-1180
Capacity kg	500
Art.-#	VD080391



Fabrication stand aluminium

Coarse thread for smooth height adjustment.

- ▶ less deadweight (15kg)
- ▶ rubber pad

Length mm	810
Width mm	535
Height mm	750-1050
Capacity kg	250
Art.-#	130389



Timber jack 800 mm

Universally applicable for many workshop activities.

- ▶ Solid spruce
- ▶ Glued and additionally screwed
- ▶ Stand width 600 mm

Length mm	800
Width mm	580
Height mm	700
Capacity kg	1000
Art.-#	8010402



Timber jack 1090 mm

Universally applicable for many workshop activities.

- ▶ Solid spruce
- ▶ Glued and additionally screwed

Length mm	1090
Width mm	750
Height mm	700
Capacity kg	1000
Art.-#	8010435




45° Clamp „Butler“ for rough surfaces

Fixing aid for simple alignment of miter edges. A perfect and unobtrusive appearance in the production of adhesive bonds (so-called aprons) is best achieved by the 45 degree bonding (miter). The Butler facilitates the setting for a perfect result.

- Material thickness of 10 to 40 mm
- Quick adjustment from above
- Suitable for smooth and rough surfaces
- Opening for squeezed glue residues
- Clamping the veneer 40-255 mm
- Fixation on suction plate or additional jackscrew
- Edge can be aligned precisely by means of additional adjustment

Length mm	213
Width mm	136
Height mm	305
Art.-#	8161255

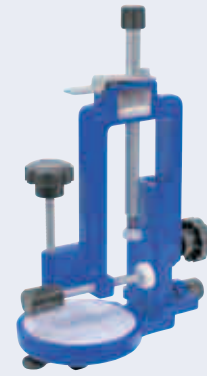


45 Degree „Push & Glue“

A truly fast, simple and accurate way to create 45 degree laminations.

- Suitable for all surfaces
- Very simple and fast handling
- The veneer can be easily inserted from above
- The smooth ejection allows control of the entire bond line

Length mm	665
Width mm	150
Height mm	150
Art.-#	8010016

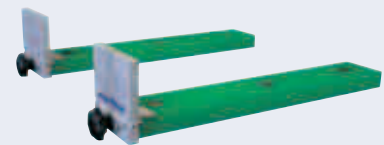

Elbow for 45° „Push & Glue“

Using the elbow extending, veneers can be quickly and accurately aligned and bonded.

- attachment with carriage bolts

Length mm	195
Width mm	150
Height mm	150
Art.-#	8010015




45° Conexx 90

Simple alignment of miter edges. It is recommended to 700 mm workpiece length one unit.

- ▶ millimeter adjustment for exact adjustmen of the miter edges.

Width mm	125
Height mm	570
Art.-#	133292

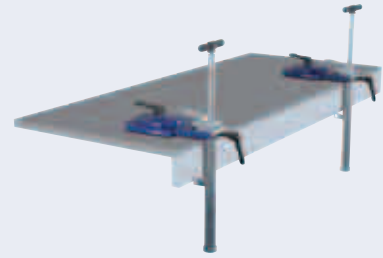


Easy Glue

Table made of aluminium with 4 clamps for easy and perfect glue of mitre edges. Also possible to work in wet areas because of aluminium construction.

- ▶ 1 Aluminium table
- ▶ 4 clamps

Length mm	1500
Width mm	600
Height mm	1020
Art.-#	135019

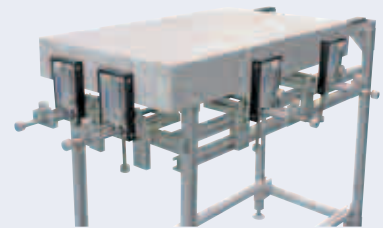

Engravers trestle hydraulic 1 t

Stroke by a hand hydraulic pump. Operating angle approx 75°.

- ▶ maximum height of stone 1560 mm

Height mm	1660
Tires mm	200
Adjustable width mm	1100/1560
Capacity kg	1000
Art.-#	8010138



Working bench

Ideal, functional table in your company.

- ▣ Robust PVC Pad
- ▣ Galvanized version
- ▣ Solid construction made of pipe profile
- ▣ Supporting telescopic and tiltable in both directions
- ▣ Lateral support specifically for working on edges of stairs etc.

Length mm	2000
Width mm	750
Height mm	730-930
Capacity kg	1800
Art.-#	8010440



Working table Vario

Individually adjustable for all application areas. Contact area with non-marking rubber.

- ▶ 2 pieces vulcanized workpiece mounting plates
- ▶ 1 pieces of stock rail
- ▶ 2 pieces rubber of surfaces

Length mm	1300
Capacity kg	400
Height mm	1090
Tires mm	160
Art.-#	SET080021



Tool trolley „Faulenzer“

Compressed-air workshop trolley with a fixed and lockable, inside divided toolbox. All contact surfaces for tools are rubber coated. There are a double compressed air distributor and a service unit installed.

- ▶ 2 steering and fixed castors
- ▶ galvanized steel

Length mm	600
Width mm	870
Capacity kg	200
Height mm	1500
Art.-#	8010447



Sculptors modelling stand

The swivel chair is quickly collapsible and can be adjusted via a crank for the height. The worktop can also tilt. An easel attachment is included.

Forming swivel chair

- ▣ steplessly height adjustment approx.. 86 to
- ▣ supporting plate bending and swivelling
- ▣ durable rack-and-pinion gear
- ▣ rack locking
- ▣ feet adjustably

Height adjustment mm	940-1420
Art.-#	4035050





Fixings

weha

Angle bracket 73x73 mm galvanized

Simple connection of enclosures.

- ▣ gusset

Thickness mm	5
Height mm	35
Leg length mm	73
Package	50
Art.-#	126179



Angle bracket with washer 75x75 mm

Simple connection of enclosures.

- ▣ Galvanized steel strip with a hole punched out to receive a sliding plate
- ▣ Corner stiffening

Thickness mm	4
Height mm	35
Leg length mm	75
Package	50
Art.-#	4070006




Angle bracket with disc 75x75 mm

Simple connection of enclosures.

- ▣ Galvanized steel strip with a hole punched out to receive a sliding plate
- ▣ Corner stiffening

Thickness mm	4
Height mm	35
Leg length mm	75
Package	50
Art.-#	4070007

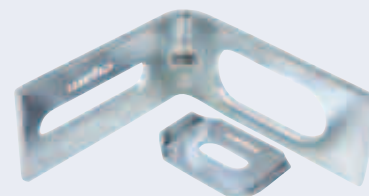

SET angle brackets & wedge anchors

The perfect combination for the connection of enclosures.

Galvanized mounting brackets for the connection of grave borders. All brackets are provided with a gusset, which ensures additional stability. Through the long holes, the mounting is facilitated. Our brackets are characterized by the special expansion sleeve which engages safely and quickly into the wellbore.

Art.-#	SET040013
--------	-----------



Drilling template for angle brackets

For precise drilling plug holes in enclosures

- ▶ The drill guides are equipped with wear-free bore bushings
- ▶ Drill spacing are matched to the head pieces or base


Art.-#	4073201
--------	---------



Mounting bracket incl. adjusting screw

This mounting bracket is ideal for connecting cover plates. Including adjusting screw.

Thickness mm	7
Height mm	70
Leg length mm	70
Width mm	35
Package	1
Art.-#	137298

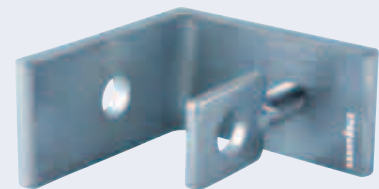

Wedge anchor 8 x 50 mm „UPAT“

For quick installation of angle brackets.

- ▶ even with difficult materials
- ▶ preassembled
- ▶ galvanized

Ø mm	8
Length mm	50
Package	100
Art.-#	4070008



Wedge anchor 8 x 50 mm „V2A“

For quick installation of angle brackets.

- ▶ even with difficult materials
- ▶ preassembled
- ▶ galvanized


Ø mm	8
Length mm	56
Package	50
Art.-#	4070009



Flat braces for grave borders

- ▶ Length 145 mm
- ▶ Width 35 mm


Thickness mm	4
Art.-#	VD040029

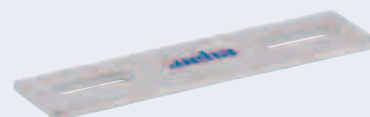

Plain dowels

- ▣ V2A
- ▣ packing 50 pcs.

Ø mm	Length mm	Art.-#
12	100	4084110
12	120	4084115
12	140	4084125
12	150	4084130
12	160	4084135
12	180	4084140
12	200	4084145
12	250	120460
14	180	4084150
14	200	4084155
16	160	4084180
16	200	4084190
16	1000	4084195

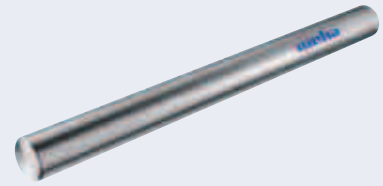

Threaded dowel

- ▣ Continuous, metric thread
- ▣ Packing unit 50 pieces
- ▣ Stainless steel V2A

Ø mm	Length mm	Art.-#
12	140	4084225
12	160	4084235
12	180	4084240
12	200	4084245
16	200	4084290



Monument fixing system „Monu-Fix“

Our new system for monument fixing.

With the new anchoring technology, it is possible, to build up the monument and remove the monument without damages whenever you want. You will have no glue between the foundation and the monument. The mounting is quite easy. 1 Person is able to do a complete mounting in around 3-4 hours. You need to drill a hole in a 45 degree angle into the foundation and fill it with cement. Afterwards, you need to put in the anchoring tools in the holes (2 x front / 2 x back) and screw it with the monument.

Art.-#	134603
--------	--------




Gravestone fixing „KOMBI“

Especially for gravestones with plinth.

- maximum height of plinth 210 mm

Rail length mm	500
Adjusting range mm	110 - 320
Package	1
Art.-#	4070001

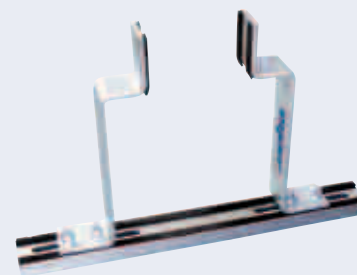


Gravestone fixing „PLUS“

The new, reinforced gravestone fixings for your exhibition! They are characterized by their extreme stability. Due to the sturdy legs, a fall of the gravestones on your terrain is almost impossible.

- This set contains 4 pairs

Rail length mm	430
Adjusting range mm	35 - 370
Package	4
Art.-#	134600

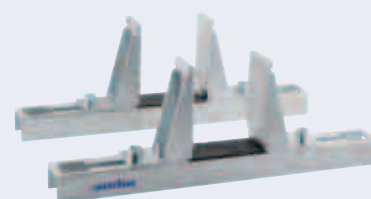

Rubber strip

Protection between edging.

- self-adhesive
- length 10 mtr.
- thickness 2 mm

Width mm	Length m	Thickness mm	Art.-#
60	10	2	4069190
80	10	2	4069192
100	10	2	4069194
120	10	2	4069196



Anti-Vibration couplings

Ø mm	Thread	Thread lenght mm	Art.-#
60	M14i/M14a	10	7036100
60	M14i/M14a	15	7036101
75	M14i/M14a	7	7036120



Quick release adaptor plate

Ø mm	Thread	Art.-#
100	M14i	7031320
130	M14i	130038





Pneumatic tools



Die grinder DG-125C

Die grinder for sculptures, fonts and chiselling for all stone types.

- Rotary valve for regulating the working speed
- Exhaust air pressure to the rear
- Vibration-insulated handle
- Including protective hood

Collet Chuck	6
Length mm	180
Rpm	35000
Air consumption l/min	220
Weight kg	0.6
db/A	78
Art.-#	7265123



Die grinder GP-8243

Handy, very fine die grinder for restoration and sculpture work.

- Speed adjustment via compressed air
- Excellent for fine work

Collet Chuck	3
Length mm	190
Rpm	60000
Air consumption l/min	220
Weight kg	0.4
db/A	85
Art.-#	7265122



Engraving pin GP-940

For markings on stone, metal, glass, plastic, etc.

- scribing of letterings or marking
- replaces the writing diamond
- carbide tip for nearly all kind of stones

Air consumption l/min	50
Length mm	160
Number of strokes per min.	34000
db/A	75
Weight kg	0.25
Art.-#	7265110



Stone Chisel Biber-Big

With this stone crusher, the slabs get a rustic look by the breaking of the edges.

- ✔ easy to use
- ✔ Ergonomically optimized overall design
- ✔ Blended edges fully voluminous
- ✔ Faster processing in contrast to conventional methods

Width mm	350
Depth mm	270
Height mm	485
Max operating pressure bar	10
Compressed air consumption/Lift dm ³	0.6
maximum thickness mm	40
Operating pressure bar	8-10
Art.-#	7264116



Pneumatic hammer „Century Art“

Ideal for high-precision work

- Stainless steel cylinder
- Control: Flatter valve
- Chisel bush can be exchanged
- Impact strength adjustable
- Handle with hand-held rubber coating
- Cylinder and chisel bush are hardened
- all internal parts made of low-wear brass

Number of strokes per min.	6800
Air consumption l/min	200
Operating pressure bar	5
Diam. piston mm	11
Shank body mm	10,2x36
Shank number	76
Art.-#	7261137



Pneumatic hammer „WSH 111“

The WSH Vibrosoft series has integrated shock absorbers for significantly reduced vibrations and a particle filter for a longer endurance.

- ergonomic plastic handle with complete soft tissue component & damping system
- all internal parts made of low-wear brass
- Piston, cylinder & chisel bush are hardened
- super handy due to longer grip
- Impact strength adjustable
- Chisel bush can be exchanged
- Control: Flatter valve

Number of strokes per min.	6500
Air consumption l/min	300
Operating pressure bar	5
Diam. piston mm	11
Shank body mm	10,2x36
Shank number	76
Art.-#	129238



Pneumatic hammer „WSH 113“

The WSH Vibrosoft series has integrated shock absorbers for significantly reduced vibrations and a particle filter for a longer endurance.

- ergonomic plastic handle with complete soft tissue component & damping system
- all internal parts made of low-wear brass
- Piston, cylinder & chisel bush are hardened
- super handy due to longer grip
- Impact strength adjustable
- Chisel bush can be exchanged
- Control: Flatter valve

Number of strokes per min.	4500
Air consumption l/min	200
Operating pressure bar	3 - 4
Diam. piston mm	13
Shank body mm	10,2x36
Shank number	76
Art.-#	7262113



Pneumatic hammer „WSH 213“

The WSH 200 series is characterized by its long-lasting grip.

- Control: Flatter valve
- ergonomic plastic handle
- Chisel bush exchangeable
- Impact strength adjustable
- Cylinder and chisel bush are hardened
- all internal parts made of low-wear brass

Number of strokes per min.	4500
Air consumption l/min	200
Operating pressure bar	3 - 4
Diam. piston mm	13
Shank body mm	10,2x36
Shank number	76
Art.-#	7261040



Pneumatic hammer „WSH 116“

The WSH Vibrosoft series has integrated shock absorbers for significantly reduced vibrations and a particle filter for a longer endurance.

- ergonomic plastic handle with complete soft tissue component & damping system
- all internal parts made of low-wear brass
- Piston, cylinder & chisel bush are hardened
- super handy due to longer grip
- Impact strength adjustable
- Chisel bush can be exchanged
- Control: Flatter valve

Number of strokes per min.	4000
Air consumption l/min	250
Operating pressure bar	3 - 4
Diam. piston mm	16
Shank body mm	10,2 x36
Shank number	76
Art.-#	7262116



Pneumatic hammer „WSH 216“

The WSH 200 series is characterized by its long-lasting grip.

- Control: Flatter valve
- ergonomic plastic handle
- Chisel bush exchangeable
- Impact strength adjustable
- Cylinder and chisel bush are hardened
- all internal parts made of low-wear brass

Number of strokes per min.	4000
Air consumption l/min	250
Operating pressure bar	3-4
Diam. piston mm	16
Shank body mm	10,2x36
Shank number	76
Art.-#	7261024



Pneumatic hammer „WSH 118“

The WSH Vibrosoft series has integrated shock absorbers for significantly reduced vibrations and a particle filter for a longer endurance.

- ▶ ergonomic plastic handle with complete soft tissue component & damping system
- ▶ all internal parts made of low-wear brass
- ▶ Piston, cylinder & chisel bush are hardened
- ▶ super handy due to longer grip
- ▶ Impact strength adjustable
- ▶ Chisel bush can be exchanged
- ▶ Control: Flatter valve



Number of strokes per min.	3000
Air consumption l/min	250
Operating pressure bar	1 - 4,5
Diam. piston mm	18
Shank body mm	10,2x36
Shank number	76
Art.-#	7262118

Pneumatic hammer „WSH 319“

The WSH 300 series is particularly suitable for heavy work thanks to its spade grip shape.

- hard impact
- Piston hardened
- ergonomic spade handle
- Cylinder surface-hardened
- Chisel bush exchangeable
- internal parts made of brass (rustproof)
- Air regulation via thumb pressure
- Adjustable air supply via regulating screw

Number of strokes per min.	3000
Air consumption l/min	300
Operating pressure bar	3 - 6
Diam. piston mm	19
Shank body mm	cone 1:10
Shank number	1112
Art.-#	7261035



Pneumatic hammer „WSH 319“

The WSH 300 series is particularly suitable for heavy work thanks to its spade grip shape.

- hard impact
- Piston hardened
- ergonomic spade handle
- Cylinder surface-hardened
- Chisel bush exchangeable
- internal parts made of brass (rustproof)
- Air regulation via thumb pressure
- Adjustable air supply via regulating screw

Number of strokes per min.	3000
Air consumption l/min	300
Operating pressure bar	3 - 6
Diam. piston mm	19
Shank body mm	12,7x50
Shank number	1410
Art.-#	7261036



Pneumatic hammer „WSH 325“

The WSH 300 series is particularly suitable for heavy work thanks to its spade grip shape.

- ▶ hard impact
- ▶ Piston hardened
- ▶ ergonomic spade handle
- ▶ Cylinder surface-hardened
- ▶ Chisel bush exchangeable
- ▶ internal parts made of brass (rustproof)
- ▶ Air regulation via thumb pressure
- ▶ Adjustable air supply via regulating screw



Number of strokes per min.	3000
Air consumption l/min	300
Operating pressure bar	3 - 6
Diam. piston mm	25
Shank body mm	cone 1:10
Shank number	1112
Art.-#	7261034

Pneumatic angle grinder WPL 1002

Powerful compressed air angle grinder for all types of grinding.

- ✔ Water regulating valve & water hose with quick coupling
- ✔ low air consumption in relation to performance
- ✔ insulated plastic housing against cold hands
- ✔ sophisticated muffler technology
- ✔ sensitive-precise & fast-moving
- ✔ safe & comfortable working
- ✔ very favorable performance weight
- ✔ Exhaust air duct to the rear
- ✔ central water supply
- ✔ universal use
- ✔ Spindle lock
- ✔ robust and handy

Power output W	950
Tool Ø	150
Art.-#	7270010



Pneumatic angle grinder WPL 900

Powerful compressed air angle grinder for all types of grinding.

- ✔ Water regulating valve & water hose with quick coupling
- ✔ low air consumption in relation to performance
- ✔ insulated plastic housing against cold hands
- ✔ sophisticated muffler technology
- ✔ sensitive-precise & fast-moving
- ✔ safe & comfortable working
- ✔ very favorable performance weight
- ✔ Exhaust air duct to the rear
- ✔ central water supply
- ✔ universal use
- ✔ Spindle lock
- ✔ robust and handy

Power output W	900
Tool Ø	130
Art.-#	7270011



Pneumatic angle grinder Blizzard

The WEHA angle grinder Blizzard is ideal for grinding and polishing on narrow radii and surfaces.

- ▶ Powerful angle grinder
- ▶ M14 receiver device
- ▶ Front handle height adjustable in 3 steps
- ▶ Backward air recirculation
- ▶ Adjustable water supply
- ▶ Speed adjustable up to 4000 rpm
- ▶ Incl. splash protection

Power output W	500
Tool Ø	120
Art.-#	137650



Pneumatic angle grinder GP 824 AS

Small, handy compressed air angle grinder for dry applications.

- ▶ recommended for small repairs
- ▶ for tools Ø 50 mm
- ▶ external thread 1/4"

Rpm	15000
Air consumption l/min	300
Length mm	167
Art.-#	7262514



Pneumatic grinder WPL

DL Angle grinder WPL600 drying
600 W, 1900 UpM, D.100mm, M14

Rpm	1900
Power output W	600
No-load speed rpm	1900
Tool Ø	100
Air consumption l/min	18
Tool holder	M14
Art.-#	7270007



WEZIT chisel

The vulcanized rubber pad minimizes the health-damaging vibrations during the engraving process and achieves a considerably higher working comfort. The shape of the rubber cushion has been optimized according to ergonomic aspects.

- ▶ Shaft shape 10,2x36 mm
- ▶ Total length 195 mm
- ▶ Shaft thickness 10 mm
- ▶ Shaft 76

Cutting width mm	Art.-#
4	4020820
6	4020821
8	4020822
10	4020823
12	4020824
14	4020825
16	4020826
18	4020827





Compressor WFK 9

This mobile gasoline compressor with an integrated Honda engine is suitable due to its enormous air supply capacity for high compressed air requirements. The wheel in the rear area and the two handles in the front make it move like a wheelbarrow.

- ▶ Container size 36 liters
- ▶ Maximum operating pressure 12 bar
- ▶ Weight: 105 kg

Suction power l	1000
Delivery l/min	790
Pressure bar	10
Vessel l	30
Power KW	5,5
Motor gasoline/electric	gas
db/A	79
Art.-#	126171

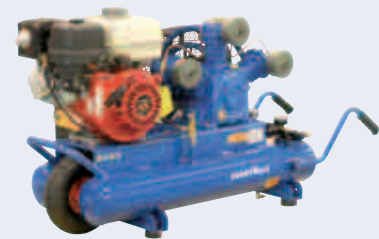

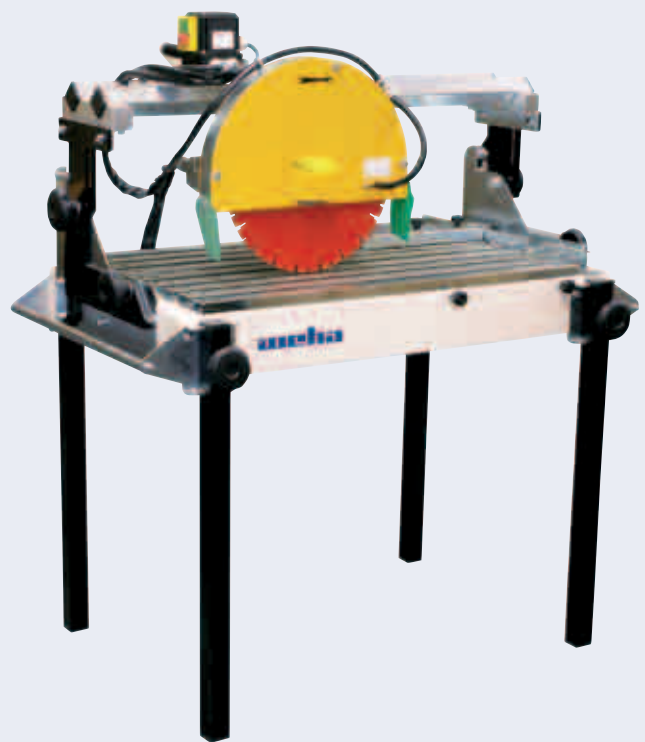

Portable bench saws

weha

Bench saw ALU

This extra light Bench saw ALU is by its aluminum design especially made for light work. It is suitable for cutting in the construction sector (thin materials) and the tiles.

- The support is pivotable about 45 °, for easy and light 45 ° -cutting
- Motor allows the use at 16 amp automatic backup
- Variable height adjustment of the support via handwheel
- Attached, splash-proof switch combination
- High performance water pump for circulating cooling water
- Suitable for diamond blade Ø 200, 300, 350 mm
- Guard in lacquered finish
- Sites & length stop



Cutting length mm	Length mm	Width mm	Height mm	Voltage	kW	Art.-#
600	690	1110	580	230	2.2	138237
800	690	1310	580	220	2.2	138239
1000	690	1510	580	220	2.2	138217
1300	690	1810	580	220	2.2	138240
1500	690	2010	600	220	2.2	138241

Bench saw Plus

The robust bench saw Plus is ideal for the general use on the site.

- Precise guidance of the support on rectangular tubes with high quality bearings
- Tilted cutting from 90° to 45°
- The motor allows the use with 16 amp automatic fuses
- Removable worktable for easy water tank cleaning
- Variable height adjustment of the support via handwheel
- Splash-proof switch combination
- High performance submersible pump for the cooling water circulation
- Suitable for diamond blades with 250, 300 and 350 mm diameter
- including side and length stop



Cutting length mm	Length mm	Voltage	Height mm	kW	Art.-#
600	1110	230	1165	2.2	7198132
600	1110	380	1165	2.9	7198132S
800	1310	230	1165	2.2	7198133
800	1310	380	1165	2.9	7198133S
1000	1510	230	1185	2.2	7198134
1000	1510	380	1185	2.9	7198134S
1300	1810	230	1185	2.2	7198135
1300	1810	380	1185	2.9	7198135S
1500	2010	230	1265	2.2	7198137
2000	2510	230	1265	2.2	7198138

Bench saw ANR

The robust bench saw ANR is ideal for the general use on the site. By reinforced guide rails precise cuts are guaranteed.



- ▶ Tilted cutting to 45°
- ▶ The motor allows the use with 16 amp automatic fuses
- ▶ Variable height adjustment of the support via handwheel
- ▶ Splash-proof switch combination
- ▶ High performance submersible pump for the cooling water circulation
- ▶ Suitable for diamond blades with 250, 300 and 350 mm diameter
- ▶ including side and length stop
- ▶ 2800 rpm

Cutting length mm	Length mm	Width mm	Height mm	kW	Weight kg	Voltage	Art.-#
600	1060	740	1335	2.2	-	230	117108
800	1260	740	1335	2.2	-	230	117109
1000	1460	740	1335	2.2	-	230	117110
1300	1760	740	1335	2.2	-	230	117111
1500	2010	740	1335	2.2	-	230	117112
2000	2510	740	1335	2.2	-	230	117113

High pressure cleaner WH 1650H

The high-pressure cleaner WH 1650H is perfect for the mobile use due to its compact construction.

- ✔ robust Honda engine GX200
- ✔ petrol powered
- ✔ self-priming or fresh water supply
- ✔ blasting pressure infinitely adjustable
- ✔ incl. 10 meter blasting hose
- ✔ incl. 5 different jet nozzles
- ✔ incl. dirt killer nozzle



Motor power HP	6.5
Pressure bar	150
Water capacity l/min	13
Weight kg	80
Hose length m	10
Art.-#	138136



Suction cabins

weha

Suction cabin WET-BOX

Water film absorbs existing dust in the air!

Dust polluted air is sucked in over the running water film on the front edge of the water wall and the internal water fog chamber absorbs existing dust in the air. For additional dust absorption there are two shafts on the inside of the machine in which are the filter cartridges located. This system allows a cleaning of the filters with water after switching off the machine.



Length mm	Depth mm	Height mm	Number of fan units	Suction power m ³ /h	Art.-#
3000	950	2350	1	15000	7240090
4000	950	2350	2	25000	7240092
2000	950	2350	1	12000	117177

Suction cabin ZYKLON dry

Dust extraction completely without water!

Dust polluted air is sucked in over a ventilator which is located on the lower sector of the machine and then cleaned by the hose filters. By this functional air induction the breathing air stays dust free to a great extent. The filters are cleaned up with air pressure system and the dust falls into the lower part of the machine. By use of the removable drawers the dust can be removed easily and fast.



Length mm	Suction power m ³ /h	Number of fan units	Height mm	Depth mm	Art.-#
2000	14000	1	2450	1400	117181
3000	16000	1	2450	1400	7415025
4000	32000	2	2450	1400	117182



Sandblasting

weha

Automatic sandblasting bridge „OPTIMO“

For a more rational sandblasting.

- ▀ fully automatic control
- ▀ easy to use
- ▀ absolutely uniform steel image
- ▀ subsequent connection of existing steel equipment is possible
- ▀ A time-controlled switch-off for maintaining the pressure peaks is integrated for the pressure peaks.



Traverse path (X)	1200
Traverse path (Y)	1200
Voltage	220
Art.-#	122184

Sandblaster Titan Kompakt

Suitable for cemetery and workshop.

- additional cyclone separator for effective separation of the dust particles from the blasting material
- Low abrasive consumption through closed circuit
- powerful vacuum cleaner
- dust-free sand-blasting unit in mobile version
- Beam depth up to a maximum of 10 mm in granite
- Quick-release valve
- Safety switch

Operating pressure bar	3,5
Air consumption l/min	500
Nozzle mm	4
Jet depth mm	8
Vacuum cleaner V/W	230/1200
Length mm	1000
Width mm	700
Height mm	600
Vessel l	15
Art.-#	122219



Sandblaster Oberon

Extra large pressure vessel for longer blasting work.

- additional cyclone separator for effective separation of the dust particles from the blasting material
- Low abrasive consumption through closed circuit
- powerful vacuum cleaner
- dust-free sand-blasting unit in mobile version
- Beam depth up to a maximum of 10 mm in granite
- Quick-release valve
- Safety switch

Operating pressure bar	3,5
Air consumption l/min	500
Nozzle mm	4
Jet depth mm	8
Vacuum cleaner V/W	230/1200
Length mm	1200
Width mm	800
Height mm	1750
Vessel l	25
Art.-#	122180



Sandblaster Hurricane 230 V

Strongest sandblaster for deep blasting work. It comes with a 2 x 230 voltage turbine for particularly good suction.

- ▶ additional cyclone separator for effective separation of the dust particles from the blasting material
- ▶ Low abrasive consumption through closed circuit
- ▶ powerful vacuum cleaner
- ▶ dust-free sand-blasting unit in mobile version
- ▶ Beam depth up to a maximum of 10 mm in granite
- ▶ Quick-release valve
- ▶ Safety switch



Operating pressure bar	3,5
Air consumption l/min	900
Nozzle mm	5
Jet depth mm	10
Vacuum cleaner V/W	230/1200
Length mm	1500
Width mm	900
Height mm	2000
Vessel l	40
Art.-#	122182

Sandblaster Hurricane 400 V

Strongest sandblaster for deep blasting work. It comes with a 400 voltage turbine for particularly good suction.

- ▶ additional cyclone separator for effective separation of the dust particles from the blasting material
- ▶ Low abrasive consumption through closed circuit
- ▶ powerful vacuum cleaner
- ▶ dust-free sand-blasting unit in mobile version
- ▶ Beam depth up to a maximum of 10 mm in granite
- ▶ Quick-release valve
- ▶ Safety switch

Operating pressure bar	3,5
Air consumption l/min	900
Nozzle mm	5
Jet depth mm	10
Vacuum cleaner V/W	380/2200
Length mm	1500
Width mm	900
Height mm	2000
Vessel l	40
Art.-#	122181



Injection sandblaster Sabinox

Compact and mobile injector sandblaster.

- ▶ For the production of antislip strips
- ▶ Suitable for blasting

Air consumption l/min	300
Vacuum cleaner V/W	220/1100
Art.-#	7415019



Sandblaster IBIX9F-2

Unique solution for easy and clean surface treatment.

- ▶ easy handling, safety and comfort
- ▶ special for preservation and restoration
- ▶ its important to have a compressor with refrigeration dryer
- ▶ one man using

Air pressure bar	0-8
Air hose inch	3/8
Hose length m	6
Standard nozzles mm	3
Air consumption l/min	500
Vessel l	9
Art.-#	7183260





Stencils & accessories



TESA 4432

- ▀ gently rolling
- ▀ easy to cut
- ▀ thickness 0,3 mm

Width mm	Roll length m	Thin depth	Art.-#
50	50	yes	4140099
100	50	yes	4140100
150	25	yes	4140110
250	25	yes	4140120
300	25	yes	4140130
500	25	yes	4140150



TESA 4443

- ▀ gently rolling
- ▀ easy to cut
- ▀ thickness 0,3 mm
- ▀ each roll 25 m
- ▀ 2-layers

Width mm	Thin depth	Average depth	machine cutting	Art.-#
450	yes	yes	yes	4140274
300	yes	yes	yes	4140273



Stencil BARRIER

- ▀ gently rolling
- ▀ easy to cut
- ▀ thickness 0,3 mm
- ▀ each roll 25 m

Width mm	Thin depth	Average depth	machine cutting	Art.-#
300	yes	yes	yes	4140030
450	yes	yes	yes	4140045



Anchor 111

Universally applicable stencil with natural rubber.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 1,2 mm
- ▶ 2-layers

Width mm	Average depth	Great depth	machine cutting	Art.-#
476	yes	yes	yes	4140450
635	yes	yes	yes	4140455



Anchor 125

Universally applicable stencil with natural rubber.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 1,2 mm
- ▶ 2-layers

Width mm	Average depth	Great depth	machine cutting	Art.-#
317	yes	yes	yes	4140423



Anchor 226

Universally applicable stencil with natural rubber.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 0,7 mm
- ▶ 2-layers

Width mm	Average depth	machine cutting	Art.-#
380	yes	yes	4140427
508	yes	yes	4140428
635	yes	yes	4140429




Stencil 3M 510

Universally applicable stencil with natural rubber.

- ▀ usable on plotters
- ▀ easy to cut
- ▀ length 9,1 m
- ▀ thickness 0,7 mm
- ▀ 2-layers

Width mm	Average depth	machine cutting	Art.-#
324	yes	yes	4140345
476	yes	yes	4140346
635	yes	yes	4140347

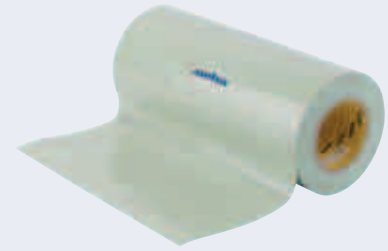

Stencil 3M 519

Universally applicable stencil with natural rubber.

- ▀ usable on plotters
- ▀ easy to cut
- ▀ length 9,1 m
- ▀ thickness 1,3 mm
- ▀ 3 layers

Width mm	Average depth	Great depth	machine cutting	Art.-#
324	yes	yes	yes	4140348
476	yes	yes	yes	4140349
635	yes	yes	yes	4140350




Stencil 3M 520

Universally applicable stencil with natural rubber.

- ▀ easy to cut
- ▀ length 9,1 m

Width mm	Average depth	Great depth	machine cutting	Art.-#
317	yes	yes	yes	4140358
476	yes	yes	yes	4140359
635	yes	yes	yes	4140360

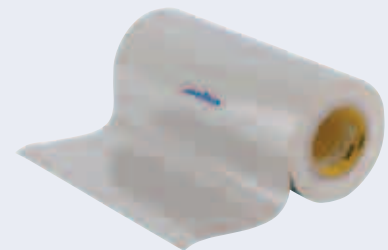

SOFTGRIP 125

The exclusive alternative of the Anchor Type 125

- ▣ usable on plotters
- ▣ easy to cut
- ▣ length 9,1 m
- ▣ thickness 1,2 mm
- ▣ 2-layers




Width mm	Average depth	Great depth	machine cutting	Art.-#
317	yes	yes	yes	130451
635	yes	yes	yes	130453
476	yes	yes	yes	130452

Stencil WESA 115S

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 18,2 m
- ▶ thickness 0,4 mm
- ▶ 2-layers

Width mm	Thin depth	machine cutting	Art.-#
317	yes	yes	4146055
476	yes	yes	4146060
635	yes	yes	4146065

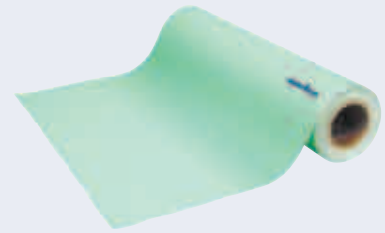


WESA 425S

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 0,6 mm
- ▶ 2-layers

Width mm	Average depth	machine cutting	Art.-#
635	yes	yes	4146030
317	yes	yes	4146005
476	yes	yes	4146015

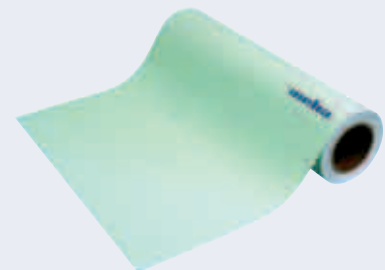


WESA 530S

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 0,8 mm
- ▶ 2-layers

Width mm	Average depth	Great depth	machine cutting	Art.-#
317	yes	yes	yes	4146070
476	yes	yes	yes	4146071
635	yes	yes	yes	4146072

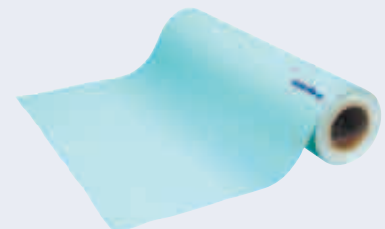

WESA 930S

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 9,1 m
- ▶ thickness 0,8 mm
- ▶ 2-layers

Width mm	Average depth	machine cutting	Art.-#
476	yes	yes	126801
317	yes	yes	126800
635	yes	yes	126802




BLASTER 2000

Universal PVC stencil for medium beam work.

- ▶ easy to cut
- ▶ Roll length 20 m
- ▶ Thickness 0.3 mm
- ▶ 2-layers

Width mm	635
Thin depth	yes
Average depth	yes
machine cutting	yes
Art.-#	4140355

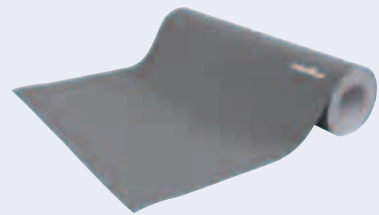


RAFATEC 610 mm

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 25 m
- ▶ thickness 0,45 mm
- ▶ 2-layers

Width mm	610
Thin depth	yes
Average depth	yes
machine cutting	yes
Art.-#	4140306

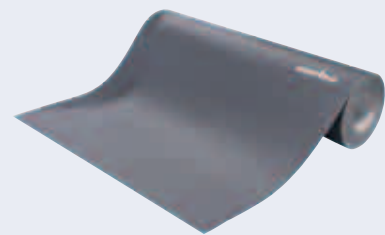

WESA 62

Very high-quality stencil made by a unique PVC mixture.

- ▶ easy to cut
- ▶ length 10 m
- ▶ thickness 0,6 mm
- ▶ 2-layers



Width mm	Thin depth	Average depth	Great depth	machine cutting	Art.-#
625	Yes	yes	yes	yes	137254
470	yes	yes	yes	yes	137253
310	yes	yes	yes	yes	137252

3M Sandblast filler

Usable for all 3M and Conti Stencils. For rough and badly bonding underground.

- for rough adherent subsoil


Capacity kg	1
Art.-#	4140460



Stencil roller

Easily and fast rolling of stencils.

Width mm	75
Art.-#	4140462

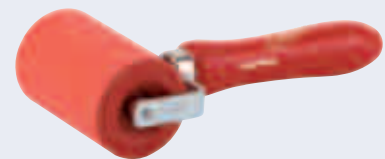

Scraper

For the easy removal of labels, adhesive residue, color, varnish remnants on all smooth surfaces.

Width mm	100
Art.-#	4140510



Extractor knife #32132

For the cutting of stencils.

- very light
- adjustable blade

Martor#	32132
Art.-#	4140520



Extractor knife #31172

For the cutting of stencils.

Martor#	31172
Art.-#	VD040115



Spray adhesive colourless

Transparent contact adhesive for small and large surfaces.

- ✔ dries within a few minutes
- ✔ Container 400 ml
- ✔ Acrylic resin base
- ✔ CFC-free

Art.-#	4100219
--------	---------



TESA Adhesive spray

Clean, economical, safe and fast bonding of large surfaces.

- ✔ free from silicone

Content ml	500
Art.-#	VD040122





Saw blades - wet use

Granite

weha

GR-Rot

Our diamond blade with the widest range of possibilities

- ▀ ideal use at higher peripheral speed
- ▀ also use on low powered machines min. 3,5 kW
- ▀ optimized cooling
- ▀ soft and easy cutting bond
- ▀ silent core
- ▀ bore 60 mm




Ø mm	Segment width mm	Segment height mm	Art.-#
350	3,0	20	5351802D
400	4,5	15	121887
400	3,0	10	5401800D
400	3,6	20	5401802D
450	3,6	20	5451802D
500	3,6	10	5501800D
500	3,6	20	5501802D
600	4,4	20	5601802D
650	5,0	20	5651802D
700	5,0	20	5701802D
800	5,5	20	5801802D

GR-Titan Silber

The diamond disk for modern bridge-saws

- ▀ laserwelded Segments
- ▀ chip removal up to 1200 cm²/min
- ▀ recommended engine power minimum 15 kW
- ▀ length of segments 25 mm
- ▀ height of segments 20 mm
- ▀ suitable for granite
- ▀ silent core
- ▀ bore 60 mm

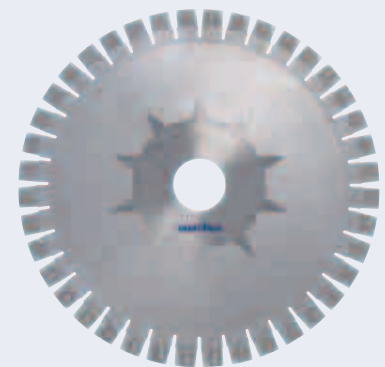

Ø mm	Segment width mm	Art.-#
400	3,2	5401410
400	3,2	5401410SCH
400	3,2	5401410SP
450	3,6	5451410
500	3,8	5501410
600	4,4	5601410

Grey Leopard

If the slogan „time is money“ counts for you and you don't want to make any compromise in the cutting quality, this diamond disk is exactly the right choice for you.

- ✔ short segmentation for extremely high cutting capacity
- ✔ arranged diamonds
- ✔ cutting performance up to 1600 cm² per minute
- ✔ silent core
- ✔ bore 60 mm



Ø mm	Segment width mm	Segment height mm	Art.-#
400	3,2	20	135350
450	3,5	20	136910
500	3,5	20	139473



„I don't speak any German!“



Purchasing

Detailed, comfortable and secure Online Shop.

► [Shop](#)



Informative

Interesting articles about new products and events.

► [Latest news](#)



Requesting

of service orders, special offers and spare parts.

► [Media](#) ► [Information and forms](#)

So what?

Not only our Webshop, but also our complete online platform is available in English. Visit us at:

[www.!\[\]\(2050890672fd7f728efcb91fa0819c3a_img.jpg\).com](http://www.weha.com)

 
Weha Ludwig Werwein GmbH
Postfach 1355
86331 Königsbrunn
GERMANY

Tel. +49 (0) 8231 | 6007-179
Fax +49 (0) 8231 | 6007-132
info@weha.com
www.weha.com

 
Steinbearbeitungsmaschinen
Vertriebsgesellschaft m.b.H.
Lange Gasse 17 | 1080 Wien
AUSTRIA

Tel. +43 (0) 1 | 4039340
Fax +43 (0) 1 | 4039340-40
office@weha-wien.at
www.weha-wien.at

Errors and technical alterations under reserve. All dimensional data are approximate.

Valid while stock lasts.